

# Monostatic RCS of Rectangular Patch Antenna in C-Band Frequency

Huda I. Hamd<sup>1</sup>, Haraa R. Hatef<sup>2</sup> and Israa Hazem Afifi

<sup>1</sup>Department of Electronic Engineering College of Engineering University of Diyala Ba'aqubah 32001, Diyala, Iraq

<sup>2</sup>Department of Communication Engineering College of Engineering University of Diyala Ba'aqubah 32001, Diyala, Iraq

Email: ihhdayahoo.com, haraa\_altaie1980@pg\_student75@yahoo.com

**Abstract** RCS is very significant to confirm data for target designation. The targets signature is different, because every target has own signature, and this specific signature is utilized to recognize the type of structure which will be tested. The monostatic radar utilizes one antenna on the body for reducing the scattering of signals for given polarization and receive and transmit in this type in the same location. Microstrip patch antenna is widely used in microwave systems especially for space applications. In this paper, rectangular microstrip antenna in c-band frequency is designed and simulated as a target to calculate monostatic RCS area using CST software. The strip antenna is simulated and modeled for different target angles (0, 45, 60 and 90) degree. The monostatic radar cross section is simulated at 8GHz with incident angles from 0 to 180 degree. The best RCS of rectangular patch antenna is about 10 dB.

P D W W K H L Q F E G H Q W D Q J O H

**Index Terms** RCS, monostatic RCS, rectangular patch antenna, target position angle

## I. INTRODUCTION

Radar Cross Section (RCS) is very significant to confirm data for target designation. The RCS varies and relies on the moving target shape, moving target size and plane wave angles. This might enhance the sensitivity of elevation targets with receiver angle adjustment to the target and transmitter for a superior RCS performance [1]. Radar cross section is essential factor which gives evidence about the locative waveform of the returned indicative of the object to the radar (Echo) that is considered as a signing up. Each target or objects have different signature, attributable into which every target have private signing up, and the specified signing up is utilized to identify the form of structure to be checked. The monostatic radar utilizes one antenna on the body for reducing the scattering of signals for given polarization and receive and transmit in this type in the same location [2].

Microstrip patch antenna is widely used in microwave systems, especially for space applications, because it has several characteristics, such as light weight, simple manufacture and lower cost [3]. A new technique is presented to decrease the RCS area of a metal backed

dipole antenna by using perfect accurately designed FSS designation. Instead of Perfect Electrical Conductor (PEC), the electromagnetic performing of the antenna is like in band, but the radar cross section of the body is safely lower out of band. The operating center frequency of this design is 4 GHz [4]. RCS reduction is presented by designing rectangular microstrip antenna with two circular apertures at DGS, and a shorting post. The usage high frequency electromagnetic software to design this antenna and these results are beneficial for low radar cross section applications. The proposed antenna has low RCS in a broadband, good return loss and gain [3]. An effective and simple approach is Proposed to minimize radar cross section of microstrip antenna in wide range. In The proposed design, a metallic ground plane of a conventional antenna is substituted by a hybrid ground consisting of bandstop FSS cells with fractional metallic plane [5]. A new design for RCS minimization of a monopole antenna is presented. This design used plasma helix based on around the antenna element. A plasma is selected in a medium that acts as absorbent and not affected on the antenna performing. The results show that the RCS of the designed antenna was minimized in a wide range of frequencies [6]. The radar cross section of the microstrip antenna was reduced using the design and experimental verification of a dual band metamaterial radar absorbing structure. The designed work was tested on the radar cross section and on the performance of the antenna through numerical and measured results. The results showed that the radar cross section was reduced within the x- band and the antenna characteristics were maintained without any unwanted differences [7]. Additionally, a dual-band metamaterial radar absorbing structure is designed to minimize RCS of a microstrip antenna. The designed antenna represents dual-band RCS reduction within X-band for different incident angles, while the radiation characteristics of the antenna are sustained without undesired changes [8]. In this paper, rectangular microstrip antenna in c-band frequency is designed and simulated as a target to calculate monostatic RCS area by depending on the variation of target angles corresponding to radar angle for a superior RCS performance as closely as possible

Manuscript received September 2020; revised March 1, 2021.  
Corresponding author email: pg\_student75@yahoo.com.  
doi:10.12720/jcm.16.4.150-154

## II. RADAR CROSSSECTION

The measurement directivity of an object visibility to radar is defined as RCS. The RCS is expressed as the area of electromagnetic waves that would reflect to the transmitting/receiving radar antenna.

The area of Radar Cross Section is depending on the [9]:

- x Radar wavelength
- x Polarization
- x Aspect angle
- x Shape and
- x Target material properties.

When the antennas transmitter and receiver of radar are gathered, Cross section refers to Monostatic, while in bistatic type the radar of transmitter and receiver are split and the cross section refers to the scattering toward the receiver. Fig. (1) shows the geometry of radar cross section for monostatic type.

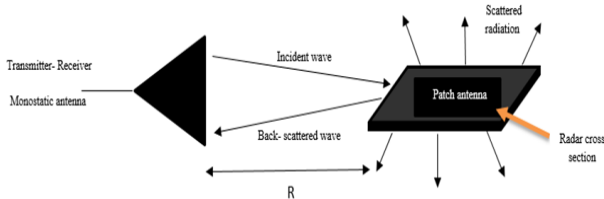


Fig. 1. Geometry of radar cross section for monostatic.

In defend and military purposes, the minimizing of radar cross section is essential aim to treat the distance which the target can be detected by the unfriendly radar. The relation between the radar cross section and the distance can be described using radar equation, and can be written as [2], [10]:

$$R_{max} = \left[ \frac{(P_t G^2 \lambda^2 \sigma)}{(4\pi)^3 P_{min} L} \right]^{1/4} \quad (1)$$

The parameters of equation can be noticed as:

$R_{max}$  = maximum distance of radar detection,

$P_t$  = transmitted power of the radar.

$P_{min}$  = detected minimum power by the radar.

$G$  = gain of the receiving/transmitting radar

$L$  = losses of the medium

$\sigma$  = radar cross section area.

According to equation above, we notice that the maximal detection distance can be minimized to the 0.5 if the RCS of target minimized 16 times of original RCS [2].

## III. MICROSTRIP PATCH ANTENNA

The rapid development of communication systems requires an integrated antenna, which is affordable and easy to design. Therefore, the patch antenna is used at the present time because it is lightweight, low in cost, easy to design and can be used in portable devices. The patch antenna consists of three main parts: substrate, ground plane and metal patch. So the substrate is an insulating

material and has a constant isolation constant, and likewise the ground level is an insulating material. A patch is a conductive material and takes several geometric shapes and the dimensions of this patch depend on the resonant frequency of the antenna.

The microstrip patch antenna depends on many factors: including length, width and height. The antenna width is symbolized by W and L is the length of the antenna and is specified between  $(0.333\lambda - 0.5\lambda)$  where  $\lambda$  is the free space wavelength and h is the antenna height and specified between  $(0.003 < h < 0.05\lambda)$  and the dielectric constant of the substrate is typically in the range  $2.2 < \epsilon_r < 12$ .

## IV. RECTANGULAR PATCH ANTENNA

There are many types of antenna use in wireless communication, the famous of their is rectangular patch antenna. The rectangular patch antenna is used in many applications such as mobile, GPS, router device and others. The reason of that, due to lightweight and small size as its constriction characteristics. Rectangular patch antenna is a simple antenna, it consists of three layers, first and third layers are made of conducting material called patch and ground plane respectively, while the second layer made of dielectric material called substrate. The design of rectangular patch antenna depends on four conditions [11], [12]

- 1- The resonant frequency.
- 2- The type of material.
- 3- Dielectric constant.
- 4- Thickness of layers.

Therefore, to provide the better efficiency and large bandwidth must be chosen thick substrate with low dielectric constant as an example.

The dimensions of patch width (WP) and length (LP) are determine in equations (2) and equation (4) [13]

$$WP = \frac{c}{2f_r \sqrt{\frac{\epsilon_r + 1}{2}}} \quad (2)$$

The height of the dielectric substrate (HS) is determined in eq (3):

$$HS = \frac{0.3c}{2\pi f_r \sqrt{\epsilon_r}} \quad HS \leq 0.06 \frac{\lambda d}{\sqrt{\epsilon_r}} \quad (3)$$

Where  $G_{eff} = G_0 / \sqrt{\epsilon_{reff}}$   $G_{LV} = WKH$   $Z_{DY} = HOHQJWK$   $P_{HGL} = X_0 PLV$   $I_{UHH} = V SDFH$   $Z_{DZ} = YSHOHQJWK$  effective dielectric constant and it calculate as in equation (4)

$$\epsilon_{reff} = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \left[ 1 + 12 \frac{HS}{WP} \right]^{-2} \quad (4)$$

The length of patch (L) is calculated in eq (5):

$$LP = LP_{eff} - 2\Delta LP \quad (5)$$

where  $\Delta LP$  is the length extension,  $LP_{eff}$  is the effective length of the patch and they can determine as in equations (6), (7) respectively:

$$\Delta LP = 0.412HS \frac{(\epsilon_{reff} + 0.3) \left[ \frac{WP}{HS} + 0.264 \right]}{(\epsilon_{reff} - 0.258) \left[ \frac{WP}{HS} + 0.8 \right]} \quad (6)$$

$$LP_{eff} = \frac{c}{2f_r \sqrt{\epsilon_{reff}}} \quad (7)$$

The dimensions of ground plane and substrate must be equal, and depend on dimension of patch layer. The length of substrate (LS) and width (WS) are calculated as in equations (8), (9) [13]

$$WS = 6HS + WP$$

$$LS = 6HS + LP$$

### V. EVALUATION OF MONOSTATIC RADAR CROSS SECTION BY CST

There are several programs for calculating Radar cross section of the antenna. CST MWS software is one of these programs. This paper deals with design and simulation rectangular microstrip antenna as a target to calculate monostatic RCS area by depending on the variation of target angle at 8 GHz

### VI. RESULTS AND DISCUSSION

In this work, Rectangular patch antenna is designed for monostatic RCS calculations at frequencies band (3-13) GHz using CST software. The antenna is built at 6GHz frequency with dimensions  $LP=11$  mm,  $WP=15.5$  mm and  $ts, hp = 0.035, 1.55$  mm respectively. The substrate material is FR4 with dielectric constant 4.4 and tangent loss 0.02, while the patch is made from copper material with dimensions  $LS=22$  mm,  $WS=31$  mm.

Fig. 2 shows RCS area simulation at 3-13 GHz frequency. It observed that best RCS of rectangular patch antenna is about  $-53$  dBm<sup>2</sup> at 8 GHz.

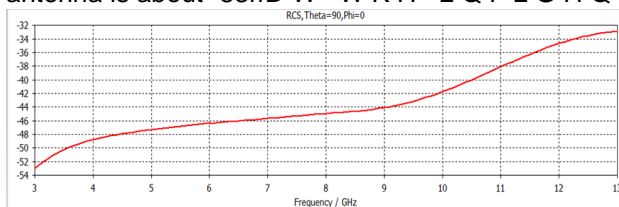


Fig. 2. Monostatic RCS of the rectangular patch antenna under polarized LQFLGHQW

The monostatic radar cross section in cartesian and polar shape of the target is simulated at 8GHz with incident angles from 0-180 degree as shown in Figures 4 -7.

The target position and (a)  $\theta = 0^\circ$ ,  $\phi = 0^\circ$ ; (b)  $\theta = 45^\circ$ ,  $\phi = 0^\circ$ ; (c)  $\theta = 60^\circ$ ,  $\phi = 0^\circ$ ; and (d)  $\theta = 90^\circ$ ,  $\phi = 0^\circ$  as shown in Fig. 3.



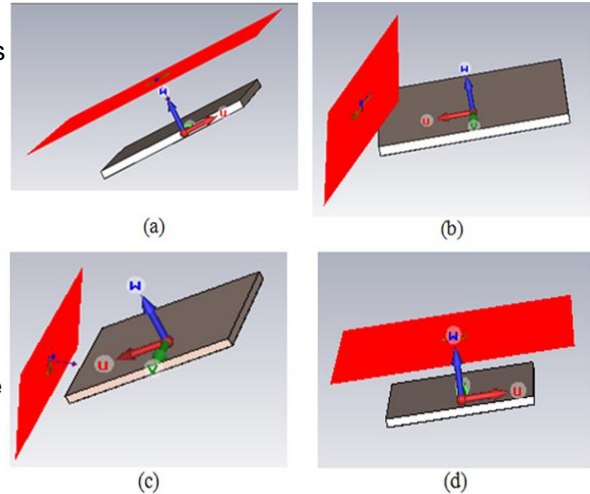


Fig. 3. The target position and (a)  $\theta = 0^\circ$ ,  $\phi = 0^\circ$ ; (b)  $\theta = 45^\circ$ ,  $\phi = 0^\circ$ ; (c)  $\theta = 60^\circ$ ,  $\phi = 0^\circ$ ; and (d)  $\theta = 90^\circ$ ,  $\phi = 0^\circ$  as shown in Fig. 3.

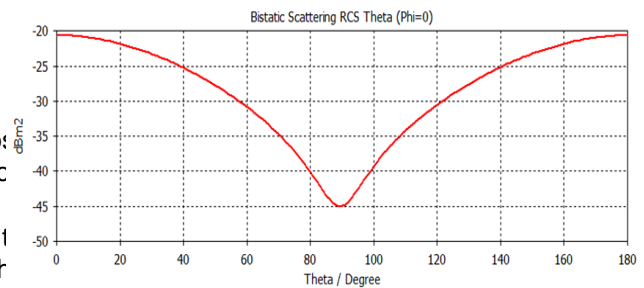


(a) cartesian




(b) polar

Fig. 4. monostatic RCS at (Theta=phi=0)

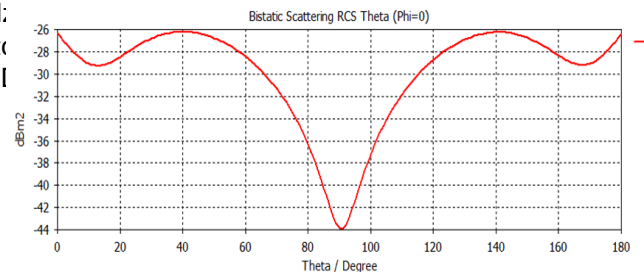

(a) cartesian



(b) polar

Fig. 5. Monostatic RCS at (Theta=45, phi=0)

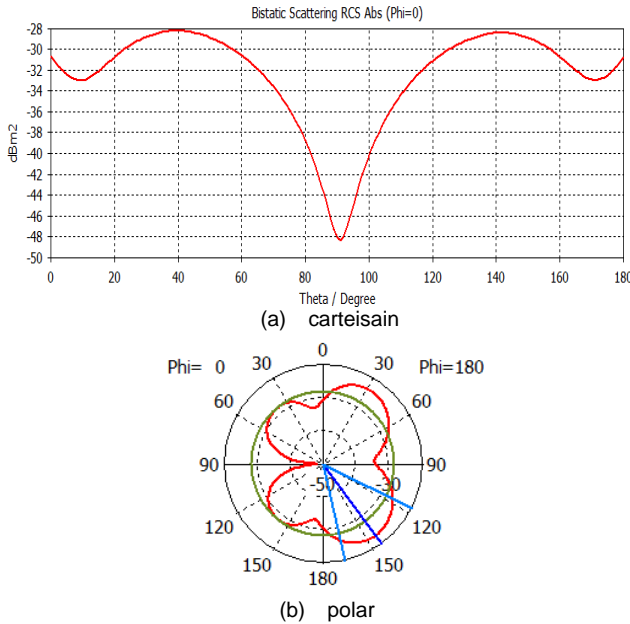


Fig. 6. Monostatic RCS at (Theta=60, phi=0)

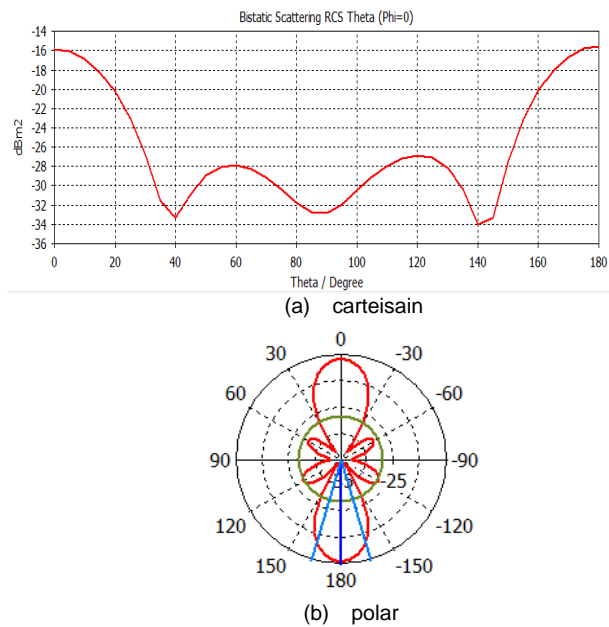


Fig. 7. Monostatic RCS at (Theta=90, phi=0)

Table I shows the maximum RCS at position angle  
 • I R I u n c i d e d .

TABLE I: RCS WITH VARIOUS TARGET POSITION

Theta	RCS			
	W K H W S K L	W K H W D S K L	W K H W D • S K L	W K H W D • S K L
0	-21	-26	-31	-16
20	-22	-28.5	-31	-20
40	-25	-26	-28	-31
60	-32	-28	-30.5	-28
80	-40	-36	-38	-32
100	-40	-37	-40	-31
120	-30	-29	-31	-27
140	-25	-26	-28.5	-34
160	-22	-28	-31	-20
180	-21	-26.5	-31	-15.5

VII. CONCLUSIONS

To understanding, the phenomena of monostatic RCS it must be studied the electromagnetic energy scattering for difference angles position of target. CST is one tools to calculate the RCS for different angles target in the operating frequency of 8GHz. The results of this work show that the target with position angle 60 has a significant RCS compared to other angles. The results of this work show that the target with position angle 60 has a significant RCS compared to other angles.

CONFLICT OF INTEREST

The authors declare no conflict of interest.

AUTHOR CONTRIBUTIONS

Huda I. Hamd and Israa Hazem Ali conducted the paper. Israa and Haraa Rahem wrote the paper and all of us had approved the final version.

REFERENCES

- [1] S. Sengupta, H. Council, B. Jackson, and D. Onofrei, "Active radar cross section reduction of an object using microstrip antennas," Radio Science, American Geophysical Union, February 2020.
- [2] A. A. N. Hafizah M. Y. H. Hazwan, A. R. N. Emileen, R. A. R. S. Azmir, and S. Asem, "RCS analysis on different targets and bistatic angles using LTE Frequency," International Journal of Industrial Electronics and Electrical Engineering, vol. 3, no. 7, pp. 1-4, 2015.
- [3] A. M. Ahmed, I. H. Ali, and H. R. Hatem, "Bi and monostatic radar cross section computation for various target's materials," International Journal of Engineering and Technology (UAE), 2019.
- [4] S. C. Zhao, B. Z. Wang, and Q. Q. He, "Broadband radar cross section reduction of a rectangular patch antenna," Progress in Electromagnetics Research, pp. 263-275, 2008.
- [5] G. G. Machado, R. Cahill, and M. T. D. Melo, "A low radar cross section dipole antenna array simulation," IEEE, 2015.
- [6] Y. H. Huan, C. X. Yu, Z. Q. Rong, M. J. Jun, and L. W. Qiang, "Broadband RCS reduction of microstrip patch antenna using bandstop frequency selective surface," Radioengineering, vol. 22, no. 4, 2013.
- [7] K. Mohsen, F. Keyvan, and A. Zahra, "Monopole antenna radar cross section reduction with plasma Helium," Journal of Electrical and Computer Engineering Innovations, vol. 5, no. 1, 2017.
- [8] S. Alireza and Z. Davoud, "Radar cross section reduction of microstrip antenna using dual-band metamaterial absorber," Aces Journal, vol. 32, no 2, February 2017.
- [9] A. Shater and D. Zarifi, "Radar cross section reduction of microstrip antenna using dual-band metamaterial absorber," ACES Journal, vol. 32, no. 2, February 2017.
- [10] H. I. Hamd, H. R. Hatem, and W. Q. Mohamed, "Evaluation of bistatic and monostatic RCS for simple and complex targets in X-band," International Journal of

*Microwave and Optical Technology*, vol. 15, no. 6, pp. 583-591, November 2020.

- [11] H. Heidar, N. Moradisoltani, and O. Alihemati, 'Simulation and reduction of radar cross section the unmanned aerial vehicle in X-band using shaping technique,' *Majlesi Journal of Telecommunication Devices*, vol. 1, no. 4, December 2012.
- [12] I. H. Huda, 'Design of microstrip antenna in LTE application and SAR evaluation for head tissue,' *Journal of Engineering and Applied Sciences*, vol. 13, no. 16, pp. 6760-6764, 2018.
- [13] W. K. Abd, M. A. Hashem, and I. H. Ali, 'Design of microstrip antenna using fractal geometry and metamaterial,' *Diyala Journal of Engineering Sciences*, vol. 8, no. 2, pp. 1-17, June 2015.
- [14] I. H. Ali, H. I. Hamd, and A. I. Abdalla, 'Design and comparison of two types of antennas for SAR calculation in wireless applications,' in *Proc. Advances in Science and Engineering Technology International Conferences (ASET)*, 2018.
- [15] Y. Han, S. Gong, J. Wang, Y. Li, S. Qu, and J. Zhang, 'A reducing RCS of patch antennas via dispersion engineering of metamaterial absorbers,' *IEEE Journals & Magazine*, pp. 1419-1425, July 2019.

Copyright © 2021 by the authors. This is an open access article distributed under the Creative Commons Attribution License ([CC BY-NC-ND 4.0](https://creativecommons.org/licenses/by-nc-nd/4.0/)), which permits use, distribution and reproduction in any medium, provided that the article is properly cited, the use is non-commercial and no modifications or adaptations are made.



**Huda Ibrahim Hamd** received the Bachelor degree in communication engineering from College of Engineering/ Diyala university in 2006/2007, Master degree in Electronics and communications engineering from Al-Mustanseriya University, Iraq, in 2013. Currently, she is a lecturer in

Electronic Department/ College Engineering / University of Diyala.



**Haraa R. Hatem** received the Bachelor degree in electronic engineering from College of Engineering / Diyala university. Master degree in Electronics and communications engineering from Al-Mustanseriya University, Iraq, in 2014. Currently, she is a lecturer in communication Department/ College

Engineering / University of Diyala.



**Israa Hazem Ali** received the degree in Electronic Engineering from College of Engineering / University of Diyala, in 2005. Master degree was received in 2013 from Almustansiriya University. Currently, she is a Lecturer at Communication Engineering / Collage of Engineering / University of Diyala