

Heterogeneous Architecture for DSRC/LTE Vehicular Communication Networks Based on ITS Reference Architecture with Fuzzy Logic for Decision Making

Michael Agyare^{1,2*}, Jerry John Kponyo², Kwasi Adu-Boahen Opare² and Kwame Oteng Gyaŋi

¹Department of Telecommunication Engineering, Ghana Communication Technology University, Ghana,

²Department of Telecommunication Engineering, Kwame Nkrumah University of Science and Technology, Kumasi, Ghana
Email: jkkponyo.soe@knust.edu.gh (J.K.), opare@knust.edu.gh (K.A.B.O.), kotenggyasi@knust.edu.gh (K.O.G.)

*Correspondence: magyare@gctu.edu.gh (M.A.)

Abstract² Methods to integrate different access technologies such as heterogeneous communication architecture remains a challenge. Among a variety of V2X supporting access technologies, Dedicated Short Range Communication (DSRC) and cellular communications, e.g., Long Term Evolution (LTE) is promising reliable and efficient vehicular communications. DSRC has been designed to allow for direct low-latency communications among different vehicles (i.e., V2V) and between vehicles and roadside units (RSU). On the other hand, DSRC suffers from link quality degradation with the presence of buildings and vehicles, especially in urban areas, where channel collisions become serious when vehicle density is high. LTE networks can provide wide area coverage and are favorable to bandwidth-greedy applications, which require high data rates and reliability. Considering the relatively high end-to-end delay for message transmission due to the long transmission time interval (TTI) current LTE networks have drawbacks regarding latency to support high-frequency safety-related information exchange among vehicles in local areas. Combining LTE and DSRC approaches as a heterogeneous solution is essential to fast introduce V2X services for future automated driving. By this intelligent Vertical Handover (VHO) algorithms are needed to ensure seamless connectivity of vehicles to the best network at a particular point in time. For this paper, we propose a 3-input fuzzy-logic-based VHO scheme for Heterogeneous DSRC/LTE Vehicular Communication Networks. The simulation results in this paper show that the proposed 3-input fuzzy-logic model can be able to make decisions and select the best network to connect to base on the network with the highest HF value. The 3-input fuzzy-logic model was also tested in a vehicular highway scenario simulation. The proposed model shows optimized communication results in terms of the mean end-to-end delay against that of the literature.

Keywords² vertical handover, heterogeneous vehicular communication, DSRC, cellular networks

I. INTRODUCTION

Every year, millions of people die in road traffic accidents around the world. About 1.25 million people die each year as a result of road traffic accidents (3400 deaths

per day)[1] according to the World Health Organization (WHO) review on road traffic injuries (May 9, 2016). Furthermore, forecasts predict worse conditions by 2020 and estimate that road traffic accidents will increase to become the seventh leading cause of death. Preventing these accidents by clearly articulating this prediction has been a challenge. Urgent action and focused efforts are required to prevent and reduce vehicle accidents and improve road safety.

Intelligent Transportation Systems (ITS) have recently attracted academia and industry to save lives, money, time, and the environment. Japan and Sweden have publicly announced the goal of a zero traffic fatality society by 2020 and beyond, hoping for such technologies (ITS). The Intelligent Transportation Association (ITSA)'s 'Vision Zero' manifesto summarizes its mission to minimize fatal accidents and delays. With the recent development of automobile and wireless communication technology, the development of ITS solves many vehicle traffic problems, such as information dissemination and traffic congestion. One component of ITS for mobile vehicle connectivity and wireless communications is the Vehicle Ad-hoc Network (VANET). VANET which has evolved into the Internet of Vehicles (IoV), is one of the new technologies with high demand in connectivity. VANET refers to an ad-hoc network made up of different nodes where a node can be a vehicle or a roadside unit. Since vehicles are mobile devices that are always in transit, there is a need to switch from one network to another network [6]. This process of switching from one network to another network is known as handover and has become a very interesting topic of research in the VANET research community.

In modern days, wireless networks have played an important role, as many communication nodes continue to grow daily [7]. Increasing network limits to fulfill the developing needs of consumers has prompted the advancement of cell correspondence networks from 1G to 5G and beyond [8]. Terminals in heterogeneous wireless networks perform horizontal handovers in a homogeneous network and vertical handovers between different types of networks [9]. Heterogeneous networks are designed to route some of the data traffic of mobile networks through

Manuscript received November 2022; revised December 2022; accepted February 1, 2023.

other colocated wireless access networks. This technique increases the capacity of the mobile network. In such networks, a vertical handover process plays an important role in providing seamless and uninterrupted connectivity as well as the required level of quality of service along with wide coverage for all mobile nodes [10]. Traditional vertical handover algorithms that are based on a single criterion (eg., received signal strength) are not performing well in terms of excess handover rates, ping effects, handover delays, handover cost, etc. [10-15].

The research seeks to propose a modified ITS protocol stack for the heterogeneous DSRC/LTE vehicular network. The research also seeks to provide a study on the performance of the handover decision in highway scenarios and the impact on the network in terms of end-to-end delay.

The rest of this paper is structured as follows. Combining DSRC and LTE as a Heterogeneous solution for vehicular communications is discussed in Section II. Vertical Handover in Heterogeneous Networks is discussed in Section III. Applying Fuzzy Logic in Heterogeneous Networks is briefly described in Section IV. Section V discusses Handover Using Velocity. Section VI discusses the Formulation of the proposed fuzzy handover model. Section VII discusses the Simulation and Results.

II. COMBINING DSRC AND LTE AS A HETEROGENEOUS SOLUTION FOR VEHICULAR COMMUNICATION

With the advancement of information and communication technology (ICT), connected vehicles have become one of the key enablers of cooperative intelligent transportation systems (C-ITS). Communications between vehicle and vehicle (V2V), vehicle and pedestrian (V2P), and vehicle and infrastructure (V2I), which is termed as vehicle to everything (V2X), greatly improve road safety and efficiency. For accelerating the implementation, the first set of C-ITS standards have been published in 2014 by the European Telecommunication Standards Institute (ETSI), where a common communication architecture, i.e., ITS station [16] was introduced. The ITS station reference architecture consists of horizontal and vertical layers, which are interconnected via logical interfaces between two adjacent layers. The horizontal layers include the access layer, the networking and transport layer, the facilities layer and the application layer, which follow the layered architecture of the open system interconnection (OSI) architecture with modifications. The newly introduced facilities layer provides services such as messages generation, processing, and timing to support C-ITS applications. The vertical layers include the management layer and the security layer, which take care of crosslayer management and security, respectively. Though the current standard focuses on dedicated short-range communication (DSRC)/802.11p, the C-ITS is designed to support other radio access technologies (RAT) such as WiFi, and wide-area communications such as long-term evolution (LTE). However, methods to integrate different access technologies such as heterogeneous communication architecture remain a challenge. Among a

variety of V2X-supporting access technologies, DSRC and cellular communications, e.g., LTE, are promising reliable and efficient vehicular communications. DSRC has been designed to allow for direct low-latency communications among different vehicles (i.e., V2V) and between vehicles and roadside units (RSU) (i.e., V2I) [17]. On the other hand, DSRC suffers from link quality degradation with the presence of buildings and trees, especially in urban areas, where channel collisions become serious when vehicle density is high [18]. While DSRC is yet to be implemented, cellular V2X (C-V2X) is catching up thanks to the advancement of radio access technologies as well as the well-maintained infrastructure. Standard targeting C-V2X has been published by the 3rd generation partnership project (3GPP) in Release 14 [19], and evolution to LTE advanced and future 5G networks is under standardization. LTE networks, as the foundation of cellular networks, can provide wide area coverage and is favorable to bandwidth-greedy applications, which require high data rate and reliability. Considering the relatively high end-to-end delay for message transmission due to the long transmission time interval (TTI) current LTE networks have drawbacks regarding latency to support high-frequency safety-related information exchange among vehicles in local areas.

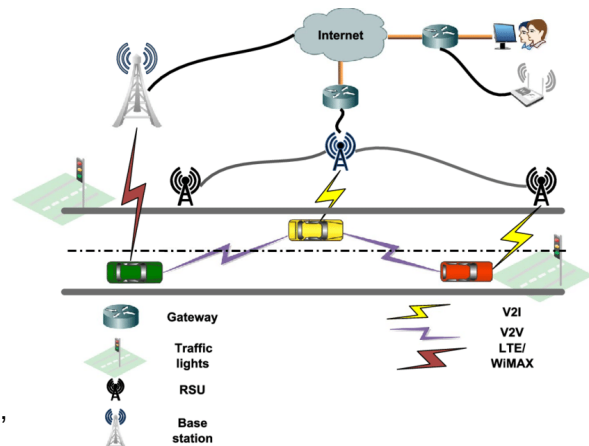


Figure 1. Communication in a heterogeneous VANET.

As seen in Fig. 1 combining LTE and DSRC/WAVE approaches as a heterogeneous solution is essential to fast introduce V2X services for future automated driving. A realistic simulation scenario based on a city for hybrid LTE/802.11p vehicular communications was proposed in [20], allowing the investigation of system performance in different use cases. Several studies, e.g., [21, 22] introduced hybrid architectures, where either DSRC interface or cellular networks is used for vehicular communications with an Always Best Connected approach. Authors in [23] proposed a hybrid approach to support video streaming applications by offloading data transmission based on RAT selection. However, the experiments were conducted using a testbed embedded only two vehicles with basically no competition on EDQGZLGWK 7KXV PRUH UHDOLVWLF competition for transmission under complicated road and traffic conditions should be investigated. The above

mentioned approaches [22, 23] usually take an either-or approach by switching between LTE and DSRC interfaces mainly based on the performance of DSRC assuming that LTE has unlimited resources, which is not realistic. Future V2X services have various service requirements. Safety-related messages need to be transmitted frequently with very low latency and high reliability, while emerging advanced services such as self-driving systems [19] require high bandwidth and reliable video streaming but could be only active for certain situations. Since neither LTE nor DSRC can support V2X integrating both as a heterogeneous solution is promising. RAT selection and vertical Handover Algorithms are needed to ensure seamless communication.

III. VERTICAL HANDOVER IN HETEROGENEOUS NETWORKS

Most of the traditional approaches use RSS to make handover decisions. These approaches compare the RSS of the current network with the RSS of the other available networks to make handover decisions. These approaches yield a severe pingpong effect when the device moves around the overlay region of various heterogeneous networks [24, 25]. This pingpong effect leads to unnecessary handover and brings low throughput, high handover delay and a high dropping rate. In VHO, many network parameters affect deciding the handover. These include security, cost, QoS performance (throughput, data rate, delay, jitter, latency, etc.), power consumption and available bandwidth [25]. The QoS criteria of various wireless technologies, which can be considered for handover, are listed in Table

A cost function-based VHO algorithm is proposed in [26]. The cost function considers different parameters such as cost, power consumption and available bandwidth. A vertical handover decision function (VHDF) is proposed in [27]. This function is evaluated for all the available networks. The network with the highest VHDF is selected as the most desirable network for handover. To obtain the highest possible QoS, the network with the maximum available bandwidth is chosen as the target network. Authors in [28] proposed a service-aware radio access technology (RAT) selection algorithm that enables a heterogeneous LTE/DSRC solution, where LTE and DSRC are selected according to services. Each vehicle is assumed to be equipped with both LTE and DSRC interfaces. Only one parameter (packet received ratio) was considered in the handover algorithm. For handover decision-making in VHO algorithms, the consideration of more than one handover parameter is necessary for optimization.

In this paper, we propose a fuzzy logic-based handover algorithm for the heterogeneous LTE/DSRC solution. This can be implemented in the ITS station reference architecture [29]. The fuzzy logic algorithm is introduced at the facilities layer to take care of network performance monitoring and network selection, as can be seen from Fig. 2. This uses three (3) handover trigger parameters to make handover decisions. That is the Received Signal Strength (RSS), Signal to Noise-to-Interference Ratio (SINR) and

Vehicle velocity. By this, we develop a fuzzy logic system that takes the varying inputs together with a rule decision table and an output as to when handover should occur. The output is a Handover Factor (HF) which is a calculation based on the varying input parameters together with a rule decision table. Based on the handover factor a decision is made. This is further explained in Section VI.

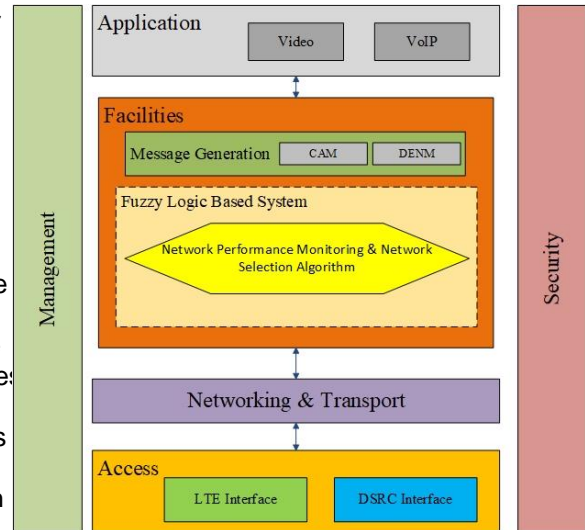


Figure 2. The proposed heterogeneous LTE/DSRC solution architecture

IV. APPLYING FUZZY LOGIC IN HETEROGENEOUS NETWORKS

Most of the VHO decision-making depends on RSS, Z K L F K Å X F W X D W H V E D V H G R Q W K H W shadowing factor, etc. This makes the handover decision unreliable. The imprecise input parameters may cause under-utilization of network resources. Fuzzy logic can effectively handle imprecise data related to radio, QoS parameters and user preferences [25].

Fuzzy logic can also be used in VHO decisions. Fuzzy based algorithms are intelligent, fast and reliable, which always keeps decision delay lower even when the number of RATs and input parameters are increased. This minimizes unnecessary handovers and decision delays and maximizes the percentage of user satisfaction. Fuzzy logic-based algorithms are highly accurate and offer as complex [30-33]. The increase in the number of input parameters and the membership functions increases the complexity. Hence, to address the tradeoff between reliability and complexity, the fuzzy input parameters, rules and the number of fuzzy controllers should be appropriately chosen as per the objectives.

In recent years, various fuzzy logic-based handover decision algorithms are proposed. A fuzzy logic in conjunction with one of the MADM called TOPSIS is proposed in [34] to minimize the handover latency, blocking probability and unnecessary handovers between 3G, 4G and 5G standards. The proposed approach uses four fuzzy controllers like RSS, QoS, velocity and battery life to make decisions. The output from each fuzzy

controller is fed into TOPSIS to determine the most appropriate target network for handover. To reduce handover latency and unessential handovers in LTE network, a fuzzy logic-based handover triggering approach is proposed [35], which triggers handover on time. A QoS-aware fuzzy logic-based network selection scheme is proposed [36] to guarantee the network QoS. This scheme suffers from unacceptable execution time, which increases with the number of decision parameters. The increased execution time increases the handover latency. In [37], the tradeoff between complexity and consistency in target network selection is addressed with the help of fuzzy logic. Here, the authors discuss three different approaches: fuzzy-only approach, fuzzy integrated with AHP and principal component analysis (PCA), and fuzzy integrated with fuzzy analytic hierarchy process (FAHP) and PCA. Based on the parameters such as signal-to-noise ratio (SNR), fuzzy logic fuzzy logic controllers estimate the user satisfaction degree (USD) and the necessity of handover.

A. RSS and SINR for Handover Decision-Making

noise ratio (SNR), signal-to-interference plus noise ratio (SINR), bit error rate (BER) and capacity [38]. The reduction in signal strength from a serving network leads to service interruption and service drop. Thus, RSS is an important metric in considering the target network for handover.

Some other works have studied the effect of considering the SINR on the handover procedure in HetNets to improve the performance of the network [39-42]. For example, in [39], the authors analyze the multi-slot performance of a moving user considering the spatial correlation and the SINR in a HetNet. Expressions of multi-slot coverage probability and the handover rate are figured out. The authors conclude that the coverage probability and the handover rate perform better with the handover procedure considers the SINR level instead of the nearest distance strategy. [40], the position and timing parameters of the handover are predicted according to the present SINR value. With this prediction, long-term window scheduling algorithm is utilized and FRPSDUHG WR D ZLQGRZWNHFKH GIMXSSIVE gain in terms of throughput. However, they supposed during the handover execution that no information was transmitted. Taking into account that their numerical results for delay achievement are high esteem, allowing communication and measuring packet loss through handover is attractive and will help produce the QoS achieved by their system. The authors [48] demonstrated how low quality in handover execution could result in severe interruption and call drops in communication, which remains a pressing issue yet to be solved. The authors thus examined a handover system given distance data of LTE high-velocity rail networks. The strategy for choosing a handover reference point conditions. The outcomes demonstrated that a small region appropriate to triggering in the overlap area can be obtained and handover execution can be expanded by

an increased uplink SINR and decreased power consumption. SINR is an important parameter to improve on the issues with handover decision making. Therefore, it is considered the second input parameter for this work.

V. HANDOVER USING VELOCITY

In wireless communication networks, the estimation of network execution. Subsequently, in recent years portable velocity estimation has been broadly considered in the literature [43-46]. The handover count-based strategy [44] LV ¿ UPO\ UHODWHG WR WKH YHORFLW\ WKH 8(¶V PRELOLW\ LV HYDOXDWHG qXDQWLW\ DFKLHYHG E\ WKH 8(LQ D S Existing Long Term Evolution (LTE) and LTE Advanced innovations utilize the handover count strategy to classify the mobility condition of UE into three large classes: low, medium, and high mobility. Hypothetically, the sojourn time-based velocity estimation [46] resulted in more exact than handover count-based velocity estimation. The authors analyzed the UE velocity in light of sojourn time samples and small cell base station (SBS) density. However, this work used an unrealistic mobility system. Furthermore, indeterminate estimation in the limit of small cells was experienced. [43], the radial velocity was gained through the most extreme power spread estimation of the received signal in mobile communications, although it required an extensive perception interim and signal noise ratio (SNR) higher than 30 dB.

Tracking velocity can fundamentally enhance handover algorithm execution by simultaneously decreasing both the handover quantity and the handover delay, as demonstrated [47, 48]. The authors [47] perceived the effect of the handover execution on communication quality, and they thus proposed a basic, effective, aware handover management scheme endeavoring to maintain longer service continuation with serving base stations (BSs) and decrease the handover rate and its related signaling. Using mathematical expressions, they demonstrated that the proposed handover method accomplished an increase in terms of throughput. However, they supposed during the handover execution that no information was transmitted. Taking into account that their numerical results for delay achievement are high esteem, allowing communication and measuring packet loss through handover is attractive and will help produce the QoS achieved by their system. The authors [48] demonstrated how low quality in handover execution could result in severe interruption and call drops in communication, which remains a pressing issue yet to be solved. The authors thus examined a handover system given distance data of LTE high-velocity rail networks. The strategy for choosing a handover reference point conditions. The outcomes demonstrated that a small region appropriate to triggering in the overlap area can be obtained and handover execution can be expanded by

diminishing the HOF probability and wiping out ping pong (PP) handover.

The above studies in the literature have shown velocity as a parameter for improving the issues with handover decisionmaking to be effective. Therefore, it is also considered the third input parameter for this work.

B. Considering RSS and SINR

The index HN will be used to designate a given Communication Technology (Comm. Tech.) Let T_0^{HN} denote the considered network serving node of Comm. Tech HN in the reference cell.

Let then $\{T_x^{HN}, x = 1 \dots M^{HN}\}$ be the set of the interfering network serving nodes deployed for Comm. Tech. HN . For HN , let P^{HN} be the power emitted by T_0^{HN} . The power received (RSS) can be expressed as in Eq. (1):

$$P_l^{HN}(w) = P^{HN} * \gamma^{HN} * X_w \quad (1)$$

where the random variables X_w are independent and identically distributed and follow an exponential distribution of parameter λ as fading is considered in [1]. Pathloss for vehicle w , $\gamma^{HN}(w)$ depends on the distance $l(w)$ from T_0^{HN} and can be given as seen in Eq. (2).

$$\gamma^{HN}(w) = E^{HN} / l(w)^\beta \quad (2)$$

where β is the pathloss exponent and E^{HN} a constant characterizing the radio propagation in HN .

From equation (1) the RSS of a vehicle associated with communication technology HN can be written as seen in Eq. (3).

$$RSS = P^{HN} * \gamma^{HN} * X_w \quad (3)$$

RSS among network serving nodes in communication technology HN can be determined using Eq. (4).

$$\delta_i^{HN} = |RSS^{HN}(w)_0 - RSS^{HN}(w)_x| < \delta_{i+1}^{HN} \quad (4)$$

where $RSS^{HN}(w)_0$ is a received RSS from the serving network node and $RSS^{HN}(w)_x$ is a received RSS from the neighboring network serving nodes, and δ_{i+1}^{HN} is the threshold determined by the AI model (Fuzzy Logic System). Neighbor cells that satisfy (4) will be designated by the AI model as candidate cells with good RSS.

SINR of a vehicle w associated with communication technology HN can be written as seen in Eq. (5).

$$SINR^{HN}(w) = \frac{P^{HN} * \gamma^{HN} * X_w}{\sigma^2 + \sum_{x=1}^{M^{HN}} P^{HN} * \gamma_x^{HN}(w) * X_x} \quad (5)$$

where σ^2 is the background noise. Also $\gamma_x^{HN}(w)$ is the path loss between T_x^{HN} and vehicle w . The best SINR among network serving nodes in communication technology HN can be determined using Eq. (6).

$$\delta_i^{HN} = |SINR^{HN}(w)_0 - SINR^{HN}(w)_x| < \delta_{i+1}^{HN} \quad (6)$$

where $SINR^{HN}(w)_0$ is a received SINR from the serving network node and $SINR^{HN}(w)_x$ is a received SINR from the neighboring network serving nodes, and δ_{i+1}^{HN} is the threshold determined by the AI model.

Neighbor cells that satisfy (6) will be designated by the AI model as candidate cells with good SINR.

C. Deriving Expression for Vehicular Velocity considering RSS and SINR

$SINR^{HN}(w)$ can also be written as seen in Eq. (7);

$$SINR^{HN}(w) = \frac{G_w * P_w}{\sigma^2 w + I_w} \quad (7)$$

where G_w is the channel gain between vehicle and its associated T_0^{HN} , P_w is the power emitted by T_0^{HN} , σ^2 is the background noise power received by the vehicle, and I_w is the interference from other neighboring network serving nodes T_x^{HN} .

The path loss model that is used here is a macrocell propagation model for urban and suburban areas. For the antenna height of 15 meters, the path loss is [2]

$$G(dB) = 58.8 + 21 \log_{10}(f) + 37.6 \log_{10}(D) + \log F \quad (8)$$

where f is the carrier frequency (5.9GHz for DSRC and LTE (C-V2X)), D is the distance in meters between the vehicle and the T_0^{HN} , and $\log F$ is the lognormal distributed shadowing with standard deviation = 10dB.

Based on (8) the threshold for estimating a good SINR by the AI Model can be written as

$$\delta = SINR^{HN}(w)_n - SINR^{HN}(w)_c \quad (9)$$

Substituting (7) to (9) then we have Eq. (10)

$$\delta = \frac{G_{w_n} * P_{w_n}}{\sigma^2 w_n + I_{w_n}} - \frac{G_{w_c} * P_{w_c}}{\sigma^2 w_c + I_{w_c}} \quad (10)$$

where notation c is indicating the current serving cell, notation n is indicating the neighbor cell, and w is representing w^{th} vehicle.

Substituting (8) in the ratio (antilog) form, we have Eq. (11).

$$\delta = \frac{10^{((37.6 \log_{10}(D_{n_w}) + G_n) / 10) * P_{w_n}}}{\sigma^2 w_n + I_{w_n}} - \frac{10^{((37.6 \log_{10}(D_{c_w}) + G_c) / 10) * P_{w_c}}}{\sigma^2 w_c + I_{w_c}} \quad (11)$$

where $G_n = 58.8 + 21 \log_{10}(f_n) + \log F$ and $G_c = 58.8 + 21 \log_{10}(f_c) + \log F$

The AI model uses δ as a parameter to force a vehicle to stay longer in the appropriate cell concerning its velocity, we calculate the velocity in D_{n_w} and D_{c_w} , in Eq. (11).

The system model in Fig. 3 is used to define the relation between δ and vehicular velocity.

where

$$\bar{D}n_w = \frac{Dn_w}{\sqrt{(x_2 - (x_c + (v.t_\delta) \cos \alpha))^2 + (y_2 - (y_c + (v.t_\delta) \sin \alpha))^2}} \quad (12)$$

$$\bar{D}c_w = \frac{Dc_w}{\sqrt{(x_1 - (x_c + (v.t_\delta) \cos \alpha))^2 + (y_1 - (y_c + (v.t_\delta) \sin \alpha))^2}} \quad (13)$$

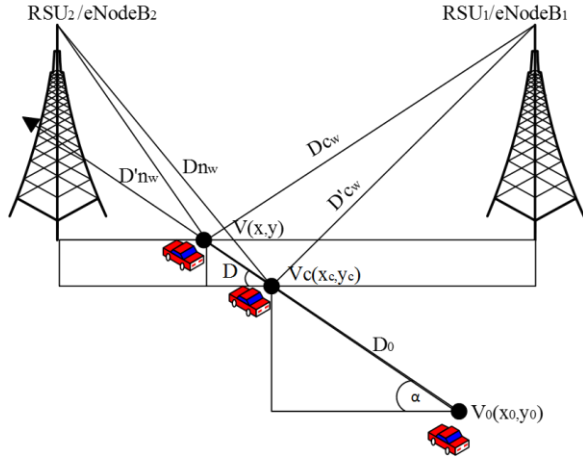


Figure 3. Vehicle traveling from point V_0 to V_c .

v is vehicular velocity and t_δ is the time needed to travel from V_c point to V point. The relation between δ and vehicular velocity can be directly understood when Eq. (12) and Eq. (13) are substituted in Eq. (11). Eq. (11) implies that for every value of velocity, the same value of δ will result in a different value of δ .

The coordinate of V_c point is needed to start applying and it can be found when the vehicle receives the same SINR from the serving and the neighbor cell when

$$\delta = 0 \quad (14)$$

$$0 = SINR^{HN}(w)_n - SINR^{HN}(w)_c \quad (15)$$

$$SINR^{HN}(w)_n = SINR^{HN}(w)_c \quad (16)$$

$$\frac{Gw_n * Pw_n}{\sigma^2 w_n + Iw_n} = \frac{Gw_c * Pw_c}{\sigma^2 w_c + Iw_c} \quad (17)$$

Substituting (17) we have Eq. (18)

$$\frac{10^{((37.6 \log_{10}(\bar{D}n_w) + G_n)/10) * Pw_n}}{\sigma^2 w_n + Iw_n} = \frac{10^{((37.6 \log_{10}(\bar{D}c_w) + G_c)/10) * Pw_c}}{\sigma^2 w_c + Iw_c} \quad (18)$$

where

$$\bar{D}n_w = \frac{Dn_w}{\sqrt{(x_2 - (x_0 + (v.t) \cos \alpha))^2 + (y_2 - (y_0 + (v.t) \sin \alpha))^2}} \quad (19)$$

and

$$\bar{D}c_w = \frac{Dc_w}{\sqrt{(x_1 - (x_0 + (v.t) \cos \alpha))^2 + (y_1 - (y_0 + (v.t) \sin \alpha))^2}}$$

$$(37.6 \log_{10}(\sqrt{(x_1 - (x_0 + (v.t) \cos \alpha))^2 + (y_1 - (y_0 + (v.t) \sin \alpha))^2}) + G_c) - (37.6 \log_{10}(\sqrt{(x_2 - (x_0 + (v.t) \cos \alpha))^2 + (y_2 - (y_0 + (v.t) \sin \alpha))^2}) + G_n)) = 10 \log\left(\frac{Pw_n}{\sigma^2 w_n + Iw_n} / \frac{Pw_c}{\sigma^2 w_c + Iw_c}\right) \quad (20)$$

where t is the time for the vehicle to travel from point V_0 to point V_c . Eq. (19) and (20) to (18) and rearranging them finally, it can be seen that the point is the point where Eq. (21) is satisfied.

From the above expression the vehicular velocity can be calculated by the time (t) it takes a vehicle to move from point V_0 to point V_c .

The velocity of a vehicle w associated with communication technology HN can be written as seen in Eq. (22)

$$V^{HN}(w) = \frac{\Delta v}{\Delta t} \quad (22)$$

where Δv is the change in position of the vehicle and Δt is the change in time of a vehicle to move from point V_0 to point V_c .

We can say let

$$\delta_i^{HN} = |V^{HN}(w)_0 - V^{HN}(w)_x| < \delta_{i+1}^{HN} \quad (23)$$

where $V^{HN}(w)_0$ is the vehicular velocity from the serving network node and $V^{HN}(w)_x$ is the vehicular velocity approaching the target node, and δ_{i+1}^{HN} is the threshold determined by the AI model.

The AI model will decide on handover depending on the RSS and SINR for the serving/target network node against the vehicular velocity. If the RSS and the SINR values from the target network are good and the vehicle is moving with a low velocity, it means the AI model can initiate handover to ensure a longer connection with the target network for a better network services experience.

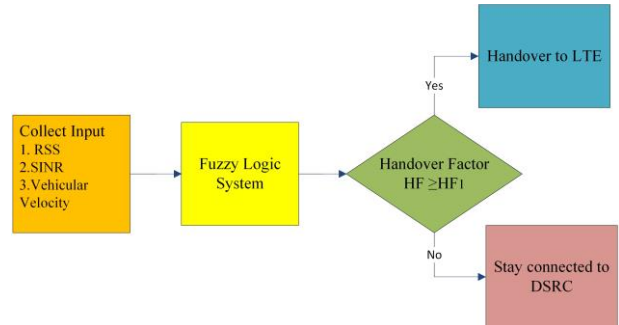


Figure 4. Fuzzy logic system with 3-inputs and 1-output

VI. FORMULATION OF THE PROPOSED FUZZY HANDOVER MODEL

7 KH HI FLHQW VHOHFWRQ RI D membership functions and rules make fuzzy logic a suitable candidate for target network selection for an

effective handover with minimal delay, the RSS, SINR and Velocity (Vehicular Velocity) used in literature are considered in this work as combined handover triggers. These three (3) parameters are considered as input parameters to the fuzzy logic system for decision making as shown in Fig. 4. Mamdani-based fuzzy system is used in this work [49]. Because of simple formulas and lower computational complexity, both trapezoidal and triangular membership functions are widely used in applications. The subjective degree of convenience to achieve fuzzy linguistic scale coverage is more for trapezoidal than for triangular membership functions. The fuzzy input range is divided equally for three linguistic variables, and the membership functions are developed accordingly. Depending on this, 27 rules are developed. For every input, there will be 125 fuzzy rules, which will increase the overall

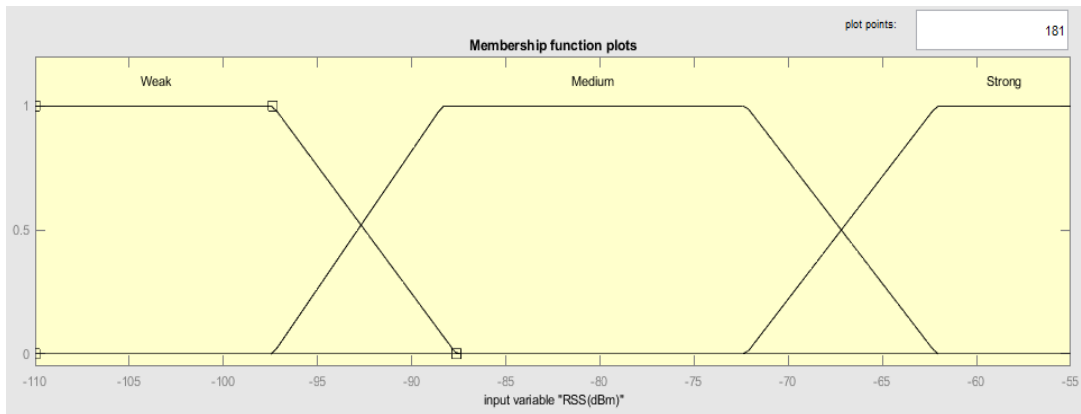


Figure 5. Membership function plot for RSS

$$R_1^i(\iota) = \begin{cases} 1, & \text{if } -119 \leq \iota \leq -102 \\ \frac{-88.9-\iota}{13.1}, & \text{if } -102 \leq \iota \leq -88.9 \\ 0, & \text{if } \iota \geq -88.9 \end{cases} \quad (24)$$

$$R_2^i(\iota) = \begin{cases} 0, & \text{if } \iota < -102 \\ \frac{\iota+102}{13.1}, & \text{if } -102 \leq \iota \leq -88.9 \\ 1, & \text{if } -88.9 \leq \iota \leq -68.2 \\ \frac{-54.6-\iota}{13.6}, & \text{if } -68.2 \leq \iota \leq -54.6 \\ 0, & \text{if } \iota \geq -54.6 \end{cases} \quad (25)$$

$$R_3^i(\iota) = \begin{cases} 0, & \text{if } \iota \leq -68.2 \\ \frac{\iota+68.2}{13.6}, & \text{if } -68.2 \leq \iota \leq -54.6 \\ 1, & \text{if } -54.6 \leq \iota \leq -40 \end{cases} \quad (26)$$

SNIR is a measure of Signal Quantity, Interference and Noise Quantity. It is a very important measurement in terms of RF and sometimes it is also called SNR in absence of interference. It indicates how much the desired signal is stronger compared to Noise and interference. Maintaining a satisfactory user experiencing SINR for a higher data rate is a major challenging task during a handover process.

The fuzzy sets for SINR of the *i*th network are represented by the linguistic variables poor, good and excellent. These are described by the membership functions $S_1^i(\zeta)$, $S_2^i(\zeta)$ and $S_3^i(\zeta)$, in Eqs. (27)-(29) respectively. The range for data rate is considered to be 0.25 dB as shown in Table 6. The related degree of membership plot is displayed in Fig. 6.

$$S_1^i(\zeta) = \begin{cases} 1, & \text{if } 0 \leq \zeta \leq 4.85 \\ \frac{10.25-\zeta}{5.4}, & \text{if } 4.85 \leq \zeta \leq 10.25 \\ 0, & \text{if } \zeta \geq 10.25 \end{cases} \quad (27)$$

$$S_2^i(\zeta) = \begin{cases} 0, & \text{if } \zeta < 7.75 \\ \frac{\zeta-7.75}{3}, & \text{if } 7.75 \leq \zeta \leq 10.75 \\ 1, & \text{if } 10.75 \leq \zeta \leq 19.25 \\ \frac{22.26-\zeta}{3.01}, & \text{if } 19.25 \leq \zeta \leq 22.26 \\ 0, & \text{if } \zeta \geq 22.26 \end{cases} \quad (28)$$

$$S_3^i(\zeta) = \begin{cases} 0, & \text{if } \zeta \leq 20 \\ \frac{\zeta-20}{5.75}, & \text{if } 20 \leq \zeta \leq 25.75 \\ 1, & \text{if } 25.75 \leq \zeta \leq 31.25 \end{cases} \quad (29)$$

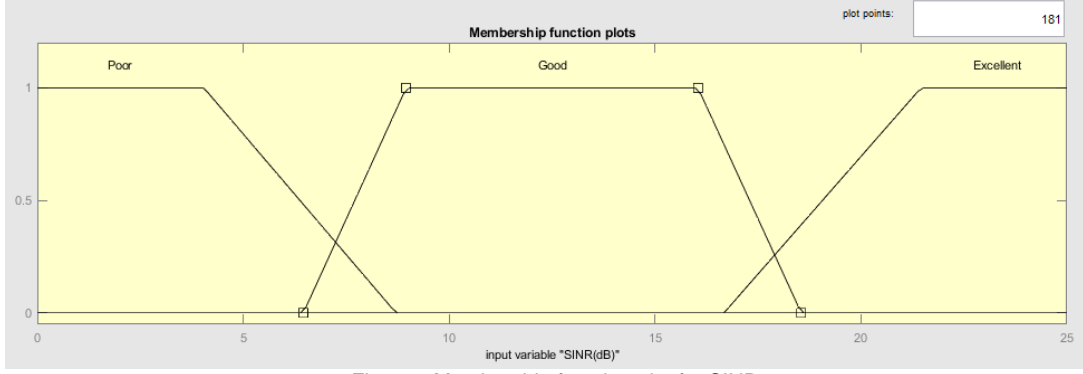


Figure 6. Membership function plot for SINR

Knowing the velocity of the vehicle determines how fast or slow a vehicle is moving into an adjacent cell or leaving the current cell. This can also be considered in handover decision making algorithms to enable vehicles to enjoy a longer connection with available networks offering a better network connection. Thus, vehicular velocity is considered one of the inputs for FIE. The fuzzy sets for the vehicular velocity are represented by the linguistic variables slow, medium and fast. These are described by the membership functions $V_1^i(\kappa)$ and $V_2^i(\kappa)$, in Eqs. (30)-(32) respectively. The range for vehicular velocity is considered to be 0-100 km/h as shown in Table I. The related degree of membership plot is displayed in Fig. 7.

$$V_1^i(\kappa) = \begin{cases} 1, & \text{if } 0 \leq \kappa \leq 20 \\ \frac{40-\kappa}{20}, & \text{if } 20 \leq \kappa \leq 40 \\ 0, & \text{if } \kappa \geq 40 \end{cases} \quad (30)$$

$$V_2^i(\kappa) = \begin{cases} 0, & \text{if } \kappa < 20 \\ \frac{\kappa-20}{20}, & \text{if } 20 \leq \kappa \leq 40 \\ 1, & \text{if } 40 \leq \kappa \leq 60.9 \\ \frac{80-\kappa}{19.1}, & \text{if } 60.9 \leq \kappa \leq 80 \\ 0, & \text{if } \kappa \geq 80 \end{cases} \quad (31)$$

$$V_3^i(\kappa) = \begin{cases} 0, & \text{if } \kappa \leq 60.9 \\ \frac{\kappa-60.9}{19.1}, & \text{if } 60.9 \leq \kappa \leq 80 \\ 1, & \text{if } 80 \leq \kappa \leq 100 \end{cases} \quad (32)$$

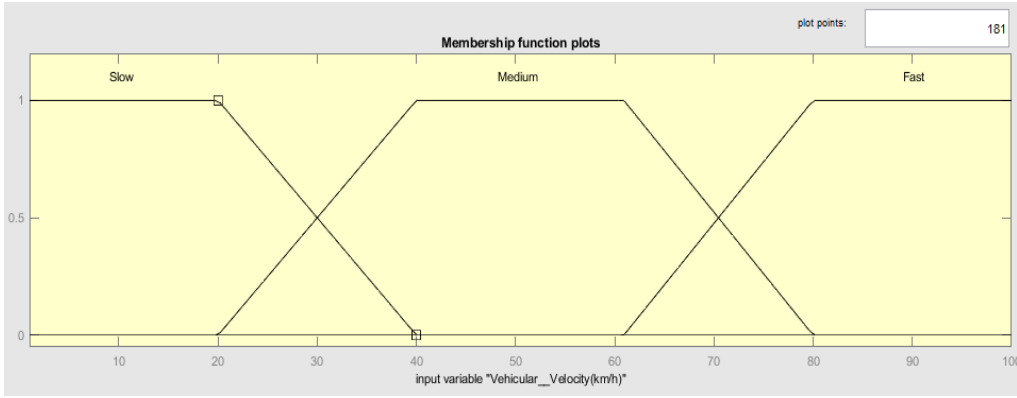


Figure 7. Membership function plot for vehicular velocity

A fuzzy set called HF is used to decide the target network. The fuzzy sets for HF of the i th network are represented by the linguistic variables very low, low, medium, high and very high. These are described by the membership functions $HF_1^i(\theta)$, $HF_2^i(\theta)$, $HF_3^i(\theta)$, $HF_4^i(\theta)$ and $HF_5^i(\theta)$, in Eqs. (33)-(37) respectively. The related degree of membership plot is displayed in Fig. 8.

$$HF_1^i(\theta) = \begin{cases} 1, & \text{if } \theta \leq 0 \\ \frac{0.225-\theta}{0.225}, & \text{if } 0 \leq \theta \leq 0.225 \\ 0, & \text{if } \theta \geq 0.225 \end{cases} \quad (33)$$

$$HF_2^i(\theta) = \begin{cases} 0, & \text{if } \theta \leq 0 \\ \frac{\theta}{0.225}, & \text{if } 0 \leq \theta \leq 0.225 \\ 1, & \text{if } 0.225 \leq \theta \leq 0.275 \\ \frac{0.475-\theta}{8.68}, & \text{if } 0.275 \leq \theta \leq 0.475 \\ 0, & \text{if } \theta \geq 0.475 \end{cases} \quad (34)$$

$$HF_3^i(\theta) = \begin{cases} 0, & \text{if } \theta \leq 0.275 \\ \frac{\theta-0.275}{0.2}, & \text{if } 0.275 \leq \theta \leq 0.475 \\ 1, & \text{if } 0.475 \leq \theta \leq 0.525 \\ \frac{0.725-\theta}{0.2}, & \text{if } 0.525 \leq \theta \leq 0.725 \\ 0, & \text{if } \theta \geq 0.725 \end{cases} \quad (35)$$

TABLE I. FUZZY INPUT PARAMETERS

Input Parameters	Excellent	Good	Poor
RSS	≥ -50 dBm	-65dBm to -90dBm	≤ -119 dBm
SINR	≥ -25 dB	-20dB to -10dB	≤ -10 dB
Vehicular Velocity	< 35 Km/h	35Km/h to 75Km/h	> 75 Km/h

$$HF_4^i(\theta) = \begin{cases} 0, & \text{if } \theta \leq 0.525 \\ \frac{\theta - 0.525}{0.2}, & \text{if } 0.525 \leq \theta \leq 0.725 \\ 1, & \text{if } 0.725 \leq \theta \leq 0.775 \\ \frac{1 - \theta}{0.225}, & \text{if } 0.775 \leq \theta \leq 1 \\ 1, & \text{if } \theta \geq 1 \end{cases} \quad (36)$$

$$HF_5^i(\theta) = \begin{cases} 0, & \text{if } \theta \leq 0.775 \\ \frac{\theta - 0.775}{0.225}, & \text{if } 0.775 \leq \theta \leq 1 \\ 1, & \text{if } \theta \geq 1 \end{cases} \quad (37)$$

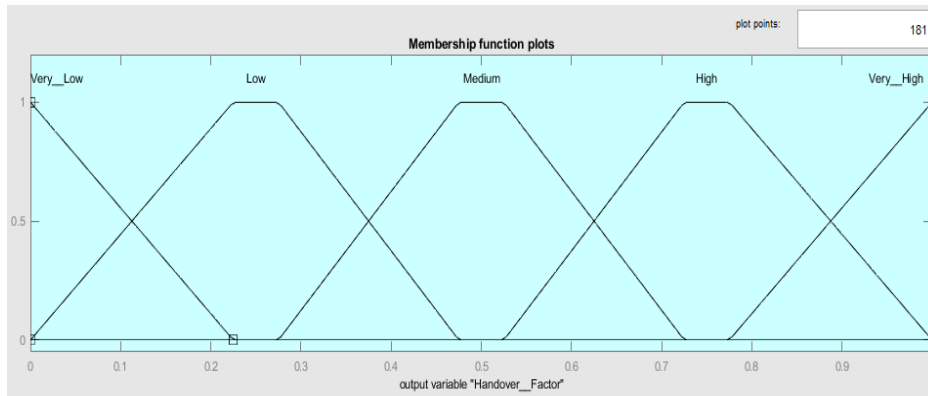


Figure 8. Membership function plot for handover factor

where $HF \in [0, 1]$. In fuzzy logic, linguistic variables are used to map the input sets to the output sets. The rules for the FIE are developed based on the input and output fuzzy sets. The fuzzy rules used by the FIE are listed in Table 1. RSS is the fundamental parameter in VHO decision making. In general, RSS based algorithms are less complex and the least DFFXUDWH 7KH AXFXDWLRQV inaccurate decision [51-53]. To achieve smooth handover and seamless connection SINR and Vehicular Velocity were also considered as input parameters in the VHO decision making process. The conventional approaches do not consider the complexities arising when dealing with uncertainties and sudden input variations. Because of its strength in adapting the randomly changing inputs and dealing with uncertainties, fuzzy logic is used in the proposed VHO decision making process. RSS and SINR of every available network LWK WKH 9HK are OHV medium and fast are 0, and 1 respectively. These values fall under rule 24 and 27. The network with maximum HF is the most preferable network for handover so that the handover vehicle may get a smooth connection with minimal delay. Figs. 9-11 explain the process of HF calculation for samples of simulation scenarios:

- RSS, SINR and Vehicular Velocity take values of 56, 25.8 and 21.3 respectively in fig. 9. The degree of membership of RSS for the linguistic variables like weak, medium and strong are 0, 0.05 and 0.5, respectively. The degree of membership of SINR for the linguistic variables like poor, good and excellent are 0, 0, and 1 respectively. Similarly, the degree of membership of Vehicular Velocity for the linguistic variables like slow, medium and fast are 0.9, 0.1, and 0, respectively. These values fall under rules 1 and 11.
- RSS, SINR and Vehicular Velocity take values of 84.5, 8.22 and 21.3, respectively in fig. 10. The degree of membership of RSS for the linguistic

variables like weak, medium and strong are 0, 0.1 and 0, respectively. The degree of membership of SINR for the linguistic variables like poor, good and excellent are 0.65, 0.35, and 0 respectively. Similarly, the degree of membership of Vehicular Velocity for the linguistic variables like slow, medium and fast are 0.95, 0.05, and 0, respectively. These values fall under rules 14 and 16. RSS, SINR and Vehicular Velocity take values of 102.5, 8.8 and 81.6, respectively in fig. 11. The degree of membership of RSS for the linguistic variables like weak, medium and strong are 1, 0 and 0, respectively. The degree of membership of SINR for the linguistic variables like poor, good and excellent are 0.7, 0.33, and 0 respectively. Similarly, the degree of membership of Vehicular Velocity for the linguistic variables like slow, medium and fast are 0, 0, and 1 respectively. These values fall under rules 24 and 27.

$$HF = \frac{\sum_{i=1}^T HF(\omega_i) \omega_i}{\sum_{i=1}^T HF(\omega_i)} \quad (38)$$

where T is the number of samples required to calculate HF. For the considered sample scenarios, HF obtained is 0.878 for Fig. 9, 0.407 for Fig. 11, and 0.225 for Fig. 12.

TABLE II. FUZZY RULES USED BY THE FIE

NO.	RSS	SINR	Vehicular Velocity	HF
1.	Strong	Excellent	Slow	Very High
2.	Strong	Excellent	Medium	Very High
3.	Strong	Excellent	Fast	Medium
4.	Strong	Good	Slow	Very High
5.	Strong	Good	Medium	High
6.	Strong	Good	Fast	Medium

7.	Strong	Poor	Slow	Low
8.	Strong	Poor	Medium	Low
9.	Strong	Poor	Fast	Very Low
10.	Medium	Excellent	Slow	High
11.	Medium	Excellent	Medium	High
12.	Medium	Excellent	Fast	Medium
13.	Medium	Good	Slow	High
14.	Medium	Good	Medium	Medium
15.	Medium	Good	Fast	Low
16.	Medium	Poor	Slow	Very Low
17.	Medium	Poor	Medium	Low
18.	Medium	Poor	Fast	Very Low
19.	Weak	Excellent	Slow	High
20.	Weak	Excellent	Medium	Medium
21.	Weak	Excellent	Fast	Medium
22.	Weak	Good	Slow	Medium
23.	Weak	Good	Medium	Medium
24.	Weak	Good	Fast	Low
25.	Weak	Poor	Slow	Very Low
26.	Weak	Poor	Medium	Very Low
27.	Weak	Poor	Fast	Very Low

Highway Speed	100km/h, 90km/h and 80km/h		
Total No. of Vehicles	100		
Standard	DSRC	LTE	
Carrier Frequency	5.89GHz	DL:2.1/ UL:1.7GHz	
RSS (dBm)	-55dBm to 100dBm	-55dBm to -100dBm	
Bandwidth	20MHz	DL:10/UL:10M Hz	
SINR (dB)	7dB to-40dB	7dB to-40dB	
Traffic			
CAM Message Size	Uniform(300B,400B)		
CAM Transmission Frequency	40Hz		
Voice Packet Size	100B		
Voice Data Rate	128kbps,1,4,7,8,9,10Mbps		
Available Networks	Transmit power(dBm)	Cell radius (km)	Bandwidth (MHz)
LTE-A	46	3	100
DSRC	13	0.30	20
WiMAX	47	10	40
HSPA	43	1	40

TABLE III. SIMULATION PARAMETERS

Parameter	Value
Simulation Time	300s
Road Model	250*250m ²
Number of lanes	2

VII. SIMULATION AND RESULTS

Here we used MATLAB 2021b, to create the simulation scenario and fuzzy toolbox to build the FIE. We also used OMNET++ and SUMO to set the simulation environment for the vehicular highway scenario.

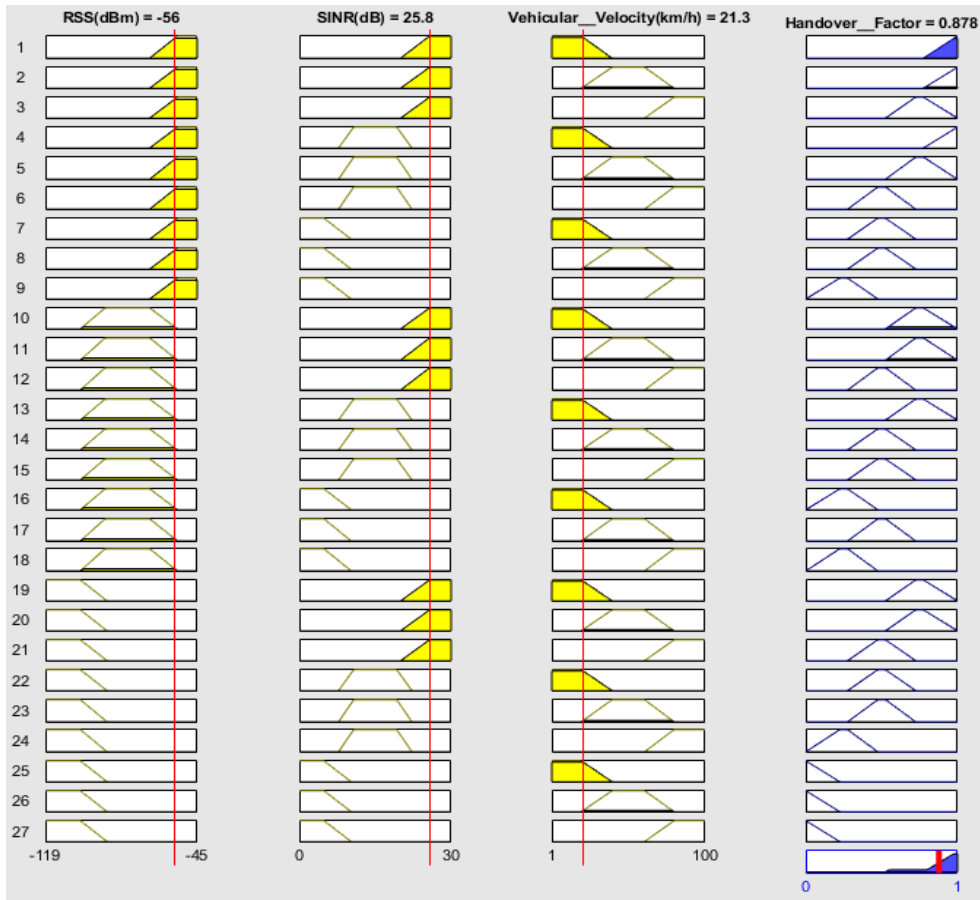


Figure 9. Rule viewer plot for every highHF calculation

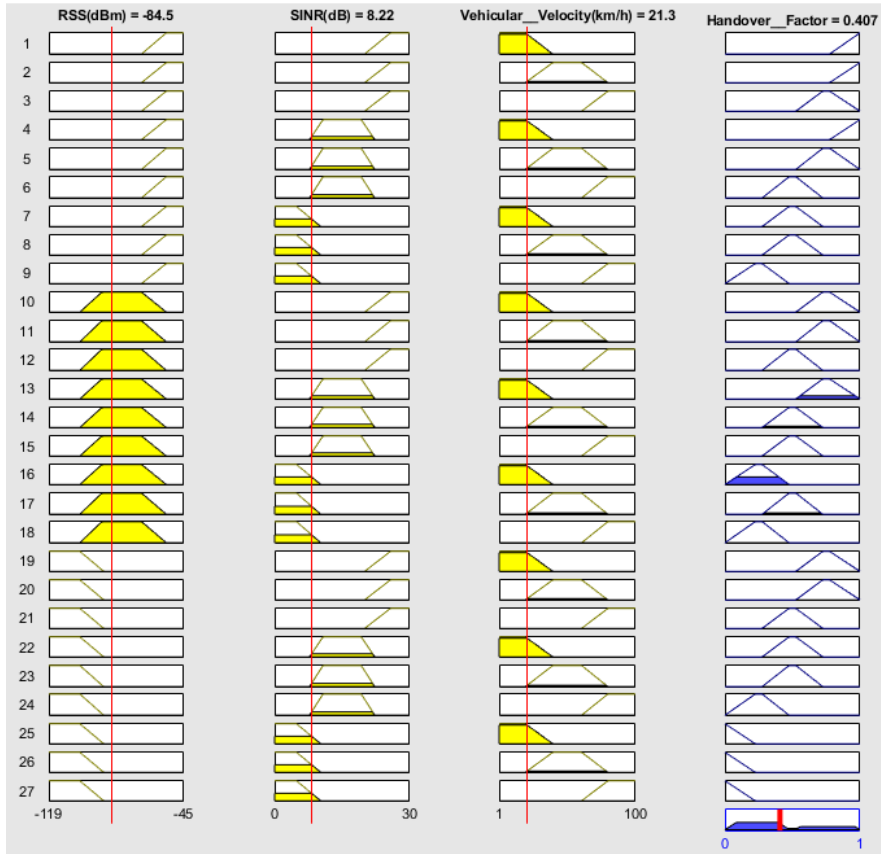


Figure 10. Rule viewer plot fomediumHF calculation

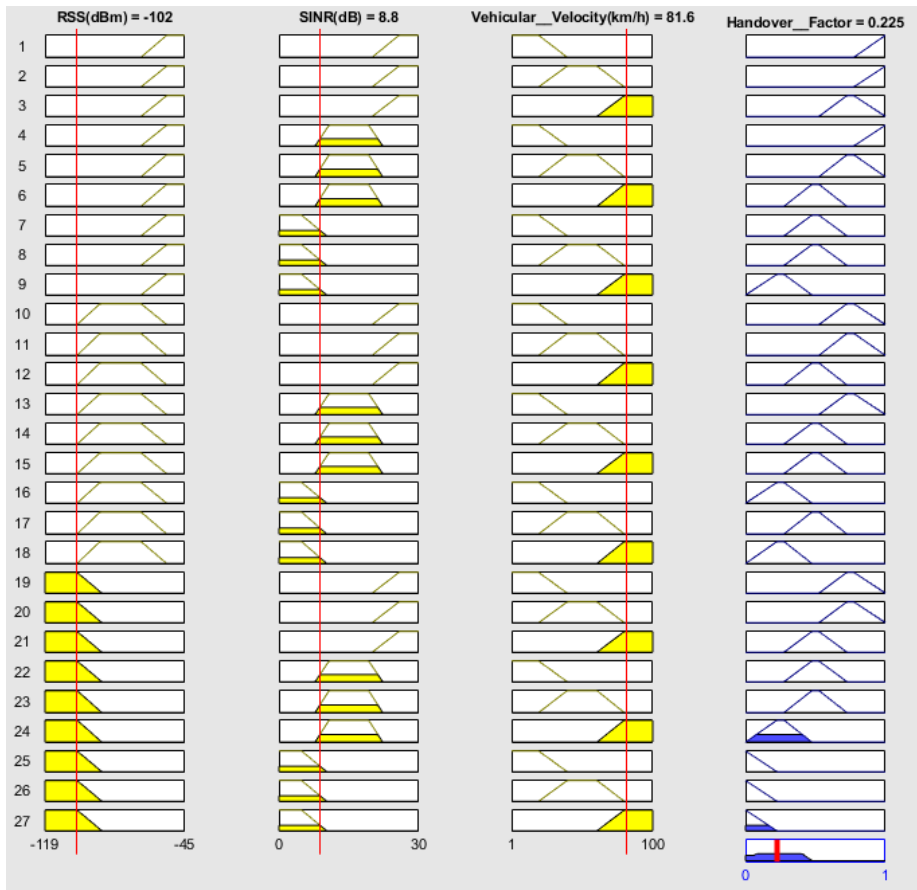


Figure 11. Rule viewer plot fofow HF calculation

A. Available Networks Simulation

IV.

Four (4) networks were considered for this simulation scenario. This simulation scenario is to indicate the best network to connect to based on the HF value of the available networks. The available networks for this consideration are DSRC, LTE, WiMAX and HSPA. The HF is calculated from each network as seen in Fig. 12.

The path loss model for LTE [55] and the other networks are listed below

$$PL(dB)^{LTE-A} = 103.8 + 20.9 \log_{10} d(km)$$

$$PL(dB)^{DSRC} = 47.9 + 18 \log_{10} d(km) + \sigma$$

$$PL(dB)^{WiMAX} = 47.9 + 18 \log_{10} d(km) + \sigma$$

$$PL(dB)^{HSPA} = 47.9 + 18 \log_{10} d(km) + \sigma$$

where $PL_0=47.9dB$ (free space path loss at 5.9 GHz in $d=1m$ distance), d is the distance in meters, and the path loss coefficient is $n = 1.8$. The margin is set to $\pm 6 dB$, which includes both shadow fading ($\pm 5 dB$ peak, according to [56]) and 1 dB transmitter calibration offsets. The margin accounts for the worst case and is thus either added or subtracted from the path loss value. Since there are no standardized path loss models for vehicular communications in current ITU standards available, these values were chosen from [57, 58], and [56] for highway scenarios excluding tunnels.

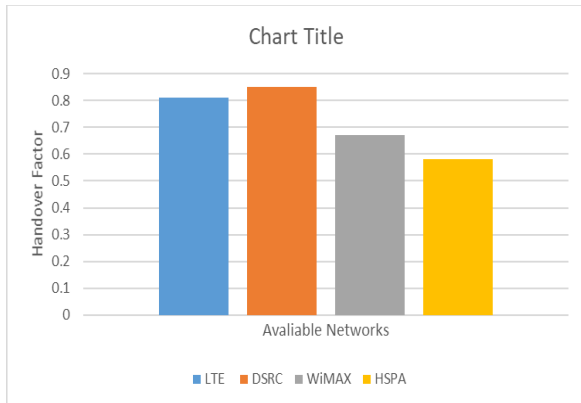


Figure 12. HF output for each available network

Based on the transmit power and path loss, the RSS value can be measured. The RSS, SINR of a target network and vehicular velocity are used to measure the handover factor of a target network. The propagation delay of each network (LTE, DSRC, WiMAX and HSPA) and the vehicular velocity are given as the input for FIE. The corresponding fuzzy output HF of each network for the considered sample scenario is displayed in Fig. 12. The HF of the DSRC network is higher than the other three networks, so the vehicle chooses DSRC as the target network.

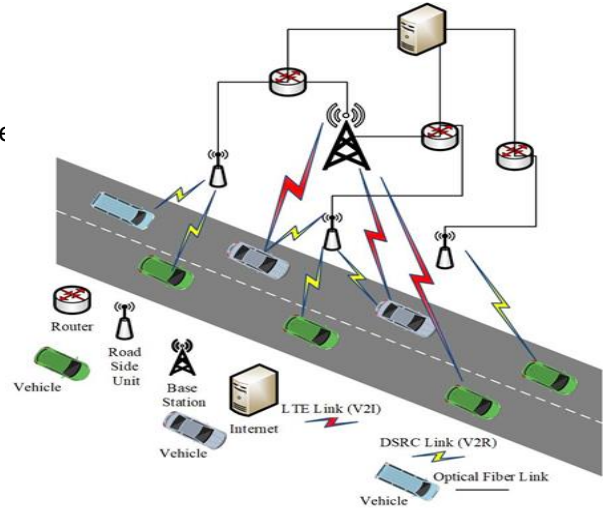


Figure 13. Vehicular highway scenario

B. Vehicular Highway Scenario

According to [60] the maximum speed limit on rural interstate highways is 113km/h with a 72km/h minimum in the US. On four-lane divided highways, the limit is 105km/h, and on all other highways it is 89km/h [60]. For this reason, the vehicular highway speeds selected for this simulation are 80km/h, 90km/h, 100km/h and 110km/h. In Fig. 13 the vehicular highway scenario was considered. That is, vehicles moving at high velocities. The communication connection between networks and serving nodes tends to drop and fail when the serving nodes in the network move at high speed from one cell to another. This causes packet drop which further affects the end-to-end delay. In this scenario, we test the proposed algorithm performance against that [28] by increasing the number of vehicles on a highway. Vehicles were increased in the order of 20, 40, 60, 80 and 100 in each case. A total of 100 vehicles were considered for the vehicular highway scenario with a vehicular velocity of 100km/h. Voice packets of about 100B were transmitted to the vehicles in the network with a varying data rate of 128kbps, 1, 4, 7, 8, 9, 10Mbps for each increase in the number of vehicles. Mean end-to-end delay was used to evaluate the performance of our proposed algorithm against that [28]. Simulation results are shown in Fig. 14.

TABLE IV. PERFORMANCE COMPARISON FOR CAM MESSAGE DISTRIBUTION

	Reference	
	Shen, X <i>et al.</i> [28]	Proposed Algorithm
Mean end-to-end delay (ms)	0.285	0.19
Number of Parameters	6	3
Methods	Packet Delivery Ratio Algorithm	Fuzzy logic Algorithm
Vehicular Speed	50km/h	50km/h
Number of Vehicles	50	50
Data Rate	10Mbps	10Mbps

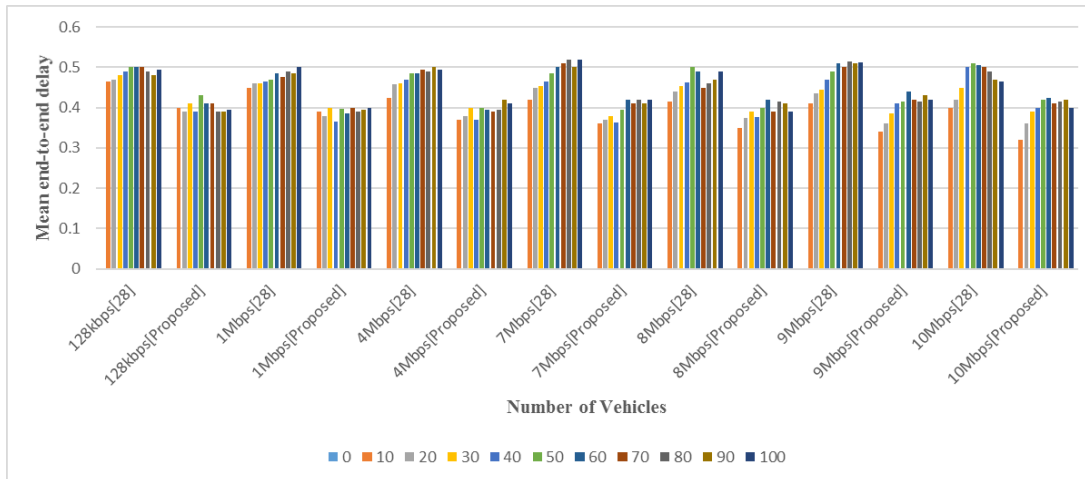


Figure 14. Graph of the Number of Vehicles against Mean end-to-end delay at 110km/h.

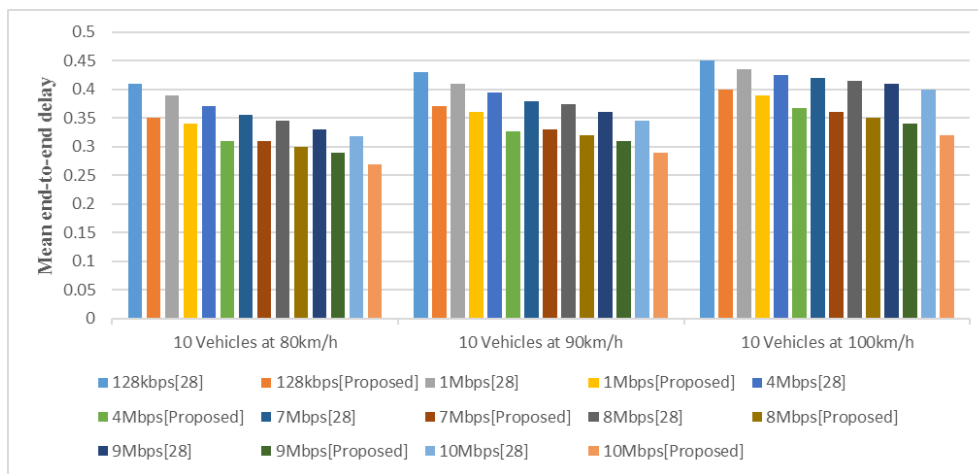


Figure 15. Graph of the 10 Vehicles against Mean end-to-end delay at 100km/h, 90km/h and 80km/h

Fig. 14 shows the simulation results of a varying number of vehicles at 110km/h experiencing different data rates with mean end-to-end delay. With the proposed system, the average latency of the voice messages greatly reduced in comparison to that [28], indicating the longer connection of vehicles to the network. This will result in a further reduction in packet loss.

From Fig. 15, 10 vehicles were varied at a vehicular speed of 80km/h, 90km/h and 100km/h. For each of the vehicular speed scenarios, data rates at 128kbps, 1Mbps, 4Mbps, 7Mbps, 8Mbps, 9Mbps and 10Mbps were also varied. In each case, the proposal was compared to that of [28].

From Fig. 15, for 10 vehicles moving at 80km/h at data rates 128kbps, 1Mbps, 4Mbps, 7Mbps, 8Mbps, 9Mbps and 10Mbps, the proposed scheme offers 14.6%, 12.8%, 16.2%, 12.6%, 13.3%, 12.1% and 15.4% reduction in mean end-to-end delay over that of [28]. For 10 vehicles moving at 90km/h at data rates 128kbps, 1Mbps, 4Mbps, 7Mbps, 8Mbps, 9Mbps and 10Mbps, the proposed scheme offers 13.9%, 11.9%, 17.2%, 13.2%, 14.7%, 13.9% and 15.9% reduction in mean end-to-end delay over that of [28]. For 10 vehicles moving at 100km/h at data rates 128kbps, 1Mbps, 4Mbps, 7Mbps, 8Mbps, 9Mbps and 10Mbps, the proposed scheme offers 11.1%, 10.3%, 13.6%, 14.3%, 15.7%, 17.1% and 20% reduction in mean

end-to-end delay over that of [28]. The results in Figs. 14 and 15 show that as the vehicle increase in speed the mean end-to-end delay increases. In both Figs. 14-15, the proposed scheme does better with optimized delay.

VIII. CONCLUSION

In this paper, we have developed a fuzzy-logic-based VHO scheme for Heterogeneous DSRC/LTE Vehicular Communication Networks. RSS, SINR and Vehicular velocity were set as inputs to the Fuzzy Inference System (FIS) and the output was a handover factor. This FIS makes calculation based on the varying input parameters together with the decision rule table to aggregate an output value called Handover Factor (HF). This HF value ranges between 0 to 1. The HF value determines the best network to connect to at any point. The higher the HF value of a particular network the better. Q H W Z R U N T V S H U I R U P D Q F H

From Table IV, a comparison of CAM message distribution for 50 vehicles at 50km/h between [28] and the proposed algorithm was made. The data rate used in each case was 10Mbps. Xiaoman et al. [28] uses Packet Delivery Ratio Algorithm which makes a decision based on Packet Delivery Ratio (PDR) for network selection. The proposed algorithm uses 3 parameters (RSS, SINR and Vehicular velocity) for network selection. Also from table 4, the

mean end-to-end delay was 0.285 and 0.19 [28] and the proposed fuzzy logic algorithm respectively. This proves it is effective to use multiple parameters for vertical handover in the heterogeneous DSRC/ LTE vehicular networks.

The simulation results in this paper show that the proposed input fuzzy logic model can be able to make decisions and select the best network to connect to base station with the highest HF value. The proposed scheme provides optimized delay at higher vehicular speed as compared to [28]. Future works are currently being carried out on certain vehicular communication scenarios, i.e. vehicular density scenarios.

CONFLICT OF INTEREST

The authors declare no conflict of interest

AUTHOR CONTRIBUTIONS

Michael Agyare conducted the research, analyzed the data and wrote the paper; Jerry John Kponyo supervised the research and edited the paper; Kwasi Adu-Boahen Opare supervised the research and edited the paper; Kwame Oteng Gyasi supervised the research and edited the paper; all authors have approved the final version.

REFERENCES

[1] : + 2UJDQL]DWLRQ 3: +2 JOREDO VDW Xobus vehicular handover algorithm for heterogeneous wireless mobile networks, *Wirel. Pers. Commun.*, vol. 59, no. 2, pp. 361-373, 2011.

[2] : + 2UJDQL]DWLRQ 3: +2 IDFW VKHHW Generation of Service Channels network, *IEEE Commun. Mag.*, vol. 44, no. 10, p. 96, 2006.

[3] - 5RWK 3+DUPRQL]LQJ FDUV DQG KXP Delineating vehicular communication in V2V, *10th International Conference on Advanced Infocomm Technology*, 2018.

[4] ITSA. [Online]. Available: Website: <http://www.itsa.org/>

[5] L. Tuyisenge, M. Ayaida, S. Tohman and L. (\$ 3 \$ PRE 200) internal vertical handover mechanism for distributed mobility, *Proc. 9th African Communications*, 2022.

[6] P. Thakur and A. Ganpati, Vertical handover techniques in VANETs, *International Journal of Vehicle Information and Communication Systems*, pp. 185-216, 2021.

[7] P. P. Kumar and K. Sagar, 5G heterogeneous network in vertical handoff for making enhanced decision algorithm, *Proc. AIP Conference Proceedings* 2418, 2022.

[8] M. M. Elsayed, K. M. Hosny, M. M. Fouda and M. M. Khashaba, Vehicles communications handover in 5G: A survey, *ICT Express*, 2022.

[9] G. Shiwei, An improved KNN based decision algorithm for vertical handover in heterogeneous wireless networks, *Proc 2021 40th Chinese Control Conference (CCC)*, 2021.

[10] P. Satapathy and J. Mahapatra, An efficient multicriteria based vertical handover decision making algorithm for heterogeneous networks, *Emerging Telecommunications Technologies*, vol. 29, 2021.

[11] ; : X D Q G ' 27 Model Machine learning based handover scheme for hybrid LiFi and WiFi networks in *Proc. the 2020 IEEE Globecom Workshops (GC Wkshps)*, Taipei, Taiwan., 2020.

[12] D. Parambanchary and V. M. M. Rao, A decision algorithm for vertical handover in heterogeneous networks, *Wirel. Netw.*, pp. 165-180, 2020.

[13] X. Tan, G. Chen and H. Sun, Vertical handover algorithm based on multi-attribute and neural network in heterogeneous integrated network, *EURASIP J. Wirel. Commun. Netw.*, 2020.

[14] A. Gupta, V. Goel, R. Garg, D. Thirupurasundari, A. Verma and M. Sain, A fuzzy based handover decision scheme for mobile devices using predictive model, *Electronics*, 2021.

[15] O. Babalola and V. Balyan, Vertical handover prediction based hidden markov model in heterogeneous wireless system, *Sensors*, 2022.

[16] Intelligent Transport System (ITS) Communications architecture, 2010.

[17] DSRC implementation guide? A guide to users of SAE J2735 message sets over DSRC, February 2010.

[18] M. Muller, WLAN 802.11p measurements for vehicle to vehicle (V2V) DSRC: Application note, June 2016.

[19] 3rd generation partnership project; Technical specification group services and system aspects study on enhancement of 3GPP support for 5G V2X services (Release 15), March 2017.

[20] A. Moller, J. Baumgarten, Z. H. Mir, and K. Filali, Realistic simulation scenario for hybrid LTE/IEEE 802.11p vehicular communication, in *Proc. 2015 11th European Conference on Antennas and Propagation (EuCAP)*, Lisbon, 2015.

[21] E. Weiss, M. Muehleisen, G. Rokitsky, B. Walke and L. Georgi, Architecture of an always best connected vehicular communication gateway, in *Proc. IEEE Vehicular Technology Conference*, Montreal, Que., Canada, 2006.

[22] J. A. Olivera, I. Cortazar, C. Pinart, A. Santos and I. Lequerica, VANBA: A simple handover mechanism for transparent, always on V2V communications, in *Proc. IEEE 69th Veh. Technol. Conf. (VTC-Spring)*, 2009.

[23] M. B. Brahim, Z. H. Mir, W. Znaidi, F. Filali and N. Hamdi, QoS aware video transmission over hybrid wireless network for connected vehicles, *IEEE Access*, vol. 5, pp. 8313-8323, June 2017.

[24] T. Thumthawatworn, P. Tillapara and P. Santiprabhob, Adaptive multi-fuzzy engines for handover decision in heterogeneous wireless networks, *Wirel. Pers. Commun.*, vol. 93, no. 4, p. 1005-1026, 2017.

[25] A. Zineb, M. Ayadi and S. Tabbane, An enhanced vertical handover based on fuzzy inference MADM approach for heterogeneous networks, *Arab. J. Sci. Eng.*, vol. 48, no. 8, p. 3263-3274, 2017.

[26] D. He, C. Chi, S. Chan, C. Chen, J. Bao and M. Yin, A simple and robust vertical handover algorithm for heterogeneous wireless mobile networks, *Wirel. Pers. Commun.*, vol. 59, no. 2, pp. 361-373, 2011.

[27] N. Nasser, A. Hasswa and H. Hassanein, Handoffs in fourth generation heterogeneous networks, *IEEE Commun. Mag.*, vol. 44, no. 10, p. 96, 2006.

[28] S. Xiaomare et al., Heterogeneous LTE/DSRC approach to support real-time vehicular communication in V2V, *10th International Conference on Advanced Infocomm Technology*, 2018.

[29] A. Gupta and R. Jha, A survey of 5G network Architecture and emerging technologies, *IEEE Access*, vol. 3, pp. 1206-1232, 2015.

[30] R. Abdullah and Z. Zukarnain, Enhanced handover decision algorithm in heterogeneous wireless networks, *Sensors*, vol. 17, no. 7, pp. 1626, 2017.

[31] L. Xia, L. Jiang and C. He, A novel fuzzy logic vertical handoff algorithm with aid of differential prediction and prediction method, in *Proc. IEEE International Conference on Communications*, pp. 5665-5670, 2007.

[32] N. Nasser, S. Guizani and E. AlMasri, Middleware vertical handoff manager: A neural network based solution, in *Proc. IEEE International Conference on Communications*, 2007.

[33] K. Pahlavan, P. Krishnamurthy, A. Hatami, M. Ylianttila, J. Makela, R. Pichna and J. Vallstron, Handoff in hybrid mobile data networks, *IEEE Pers. Commun.*, vol. 7, no. 2, pp. 34-47, 2000.

[34] F. Bari and V. Leung, Multi-attribute network selection by iterative TOPSIS for heterogeneous wireless access, *IEEE Consumer Communications and Networking Conference*, 2007.

[35] C. Kwong, T. Chuah, S. Tan and A. Akbari Moghanjoughi, An adaptive fuzzy handover triggering approach for long term evolution network, *Expert Syst.*, vol. 33, no. 1, p. 30-45, 2016.

[36] V. Kantubukta, S. Maheshwari, S. Mahapatra and C. Kumar, Energy and quality of service aware FUZZI technique for order preference by similarity to ideal solution based vertical handover decision algorithm for heterogeneous wireless networks, *IEEE Netw.*, vol. 2, no. 3, p. 10-14, 2013.

[37] A. Chinnappan and R. Balasubramanian, Complexity consistency tradeoff in multi-attribute decision making for vertical handover in heterogeneous wireless networks, *IEEE Netw.*, vol. 5, no. 1, p. 13-21, 2016.

- [38] Y. Nkansah Gyekye, 'An intelligent vertical handoff decision algorithm in next generation wireless networks', 2010.
- [39] X. Zhang, Y. Xie *et al.*, 'Multi-slot coverage probability and SINR based handover rate analysis for mobile user in HetNets', *IEEE Access*, vol. 6, pp. 17868-17879, 2018.
- [40] H. Li, S. Habibj and G. Ascheid, 'Handover prediction for long term window scheduling based on SINR maps', *Proc. 2013 IEEE 24th Annual Int. Symp. on Personal, Indoor, and Mobile Radio Communications (PIMRC)*, London, 2013.
- [41] A. Bathich *et al.*, 'Performance of SINR based handover among heterogeneous networks in MIH environments', in *Proc. 2013 IEEE 3rd Int. Conf. on System Engineering and Technology*, Shah Alam, 2013.
- [42] B. Zhang, W. Qi and J. Zhang, 'An energy efficiency and ping pong handover ratio optimization in tier heterogeneous networks', in *Proc. 2018 IEEE 8th Annual Computing and Communication Workshop and Conf. (CCWC)*, Las Vegas, NV, 2018.
- [43] K. Baddour and N. Beaulieu, 'Robust doppler spread estimation in nonisotropic fading channels', *IEEE Trans. Wirel. Commun.*, vol. 4, pp. 2677-2682, 2005.
- [44] M. Arvind and I. Güvenç, 'Handover count based velocity estimation and mobility state detection in dense HetNets', *IEEE Trans. Wirel. Commun.*, vol. 15, pp. 4673-4688, 2016.
- [45] A. Merwaday, I. Güvenç, W. Saad, A. Mehdodniyand F. Adachi, 'Sojourn time based velocity estimation in small cell poisson networks', *IEEE Commun. Lett.*, vol. 20, p. 3403-3406, 2016.
- [46] A. Merwaday and G. Ismail, '6 S H F Velocity estimation of wireless network devices', U.S. Patent 9,584,976, 2017.
- [47] R. Arshad, H. ElSawy, S. Sorour, T. Naffouri, and M.S. Alouini, 'Velocity-aware handover management in tier cellular networks', *IEEE Trans. Wirel. Commun.*, vol. 16, pp. 1851-1867, 2017.
- [48] R. Zhang, M. Wu and Y. Zhang, 'Analysis of handover trigger scheme based on distance for LTE high speed railway networks', *TELKOMNIKA Telecommun. Comput. Electron. Control*, vol. 14, pp. 129-135, 2016.
- [49] I. Iancu, 'A Mamdani type fuzzy logic controller', *Fuzzy Logic Controls, Concepts, Theories and Applications*, InTech, Romania, 2012.
- [50] M. Arthi and P. Arulmozhivarman, 'Power-aware fuzzy based joint base station and relay station deployment scheme for green radio communication', *Sustain. Comput. Inform. Syst.*, vol. 13, pp. 1-4, 2017.
- [51] C. Eshanta, M. Ismail, K. Juma and P. Yahaya, 'VHO strategy for QoS provisioning in the WiMAX/WLAN interworking system', *Asian J. Appl. Sci.*, vol. 2, no. 6, p. 511-20, 2009.
- [52] X. Yan, N. Manj and Y. Sekercioglu, 'A traveling distance prediction based method to minimize unnecessary handovers from cellular networks to WLANs', *IEEE Commun. Lett.*, vol. 12, no. 1, p. 4-6, 2008.
- [53] S. Mohanty and I. Akyildiz, 'A crosslayer (layer 2+3) handoff management protocol for next generation wireless systems', *IEEE Rans. Mob. Comput.*, vol. 5, no. 10, p. 1347-360, 2006.
- [54] M. Arthi and P. Arulmozhivarman, 'Fuzzy logic based coverage and cost effective placement of serving nodes for 4G and beyond cellular networks', *Wirel. Commun. Mob. Comput.*, 2016.
- [55] Y. Yuan, 'LTE-a relay scenarios and evaluation methodology', *LTE-Advanced Relay Technology and Standardization*, 2013.
- [56] J. Karedal, N. Czink, A. Paier, F. Tufvesson and A. F. Molisch, 'Path loss modeling for vehicle-to-vehicle communication', *IEEE Transactions on Vehicular Technology*, 2010.
- [57] L. Cheng, B. E. Henty, F. Bai and D. D. Stancil, 'Highway and rural propagation channel modeling for vehicle-to-vehicle communications at 5.9 GHz', in *Proc. IEEE Antennas Propagation Soc. Int. Symp.*, 2008.
- [58] J. Kunisch and J. Pamp, 'Wideband car-to-car radio channel measurements and model at 5.9 GHz', *Proc. IEEE Veh. Technol. Conf.*, 2008.
- [59] ETSI, 'Intelligent transport system (ITS); Mitigation techniques to avoid interference between European Coordinated short range communication (CEN DSRC) equipment and intelligent transport systems (ITS) operating in the 5 GHz frequency range', ETSI, F-06921 Sophia Antipolis Cedex France 2012.

Copyright © 2023 by the authors. This is an open access article distributed under the Creative Commons Attribution License [CC BY-NC-ND 4.0](https://creativecommons.org/licenses/by-nc-nd/4.0/), which permits use, distribution and reproduction in any medium, provided that the article is properly cited, the use is non commercial and no modifications or adaptations are made.