

Adaptive Sliding Contention Window Design to Minimize Safe Message Collision Rates with Different Priority Levels in VANET

NguyenHoangChien^{1,*} and Pham Thanh Giang²

¹University of Economics and Technology for Industries, Hanoi, Vietnam

²Institute of Information Technology, Vietnam Academy of Science and Technology, Hanoi, Vietnam

Email: ptgiang@ioit.ac.vn (P.T.G.)

*Correspondence: nhchien@uneti.edu.vn (N.H.C.)

Abstract In Vehicular Ad Hoc Networks (VANETs), the broadcast is an important form of communication and occupies the main traffic in the network. However, since there is no recovery for broadcast frames in the VANET network, the collision rate between safe message traffic can become very high, especially in vehicle-dense network conditions. This paper proposes a new coordination mechanism that adaptively controls the Contention Window (CW) size for broadcast to reduce the safe message collision rate with different priority levels. In our mechanism, each vehicle in the VANET can automatically adjust the CW based on the perception of the current network condition by analyzing the percentage of successfully received frames. The algorithm controls the CW size by sliding the window with a dynamic persistence factor according to each type of safe message traffic. Each data traffic chooses a backoff timer dynamically varying in the range $[0, CW[AC[i]]]$, which can overlap the CW range with other data traffic to improve efficient bandwidth depending on the network conditions. Simulation results prove that the proposed mechanism significantly reduces the collision rate for both safe message traffic in high-priority and low-priority in vehicle-dense network conditions.

Keywords VANET, dedicated short range communication (dsrc), enhanced distributed channel access (EDCA), medium Access control (MAC), adaptive sliding contention window (ASCW)

I. INTRODUCTION

Vehicular Ad Hoc Network (VANET) is a subclass of Mobile Ad Hoc Networks (MANETs). It is designed for using in Intelligent Transportation Systems to connect wireless between vehicles. In addition to the outstanding characteristics in communication inherited from MANET, such as flexible infrastructure, mobility, better connectivity, secure transfer between different networks, etc [1]. VANET has some unique characteristics including high mobility of vehicles, rapidly changing network topology, high density of the network, predictable roads pattern, unlimited energy, no restriction on network size

etc. used to control wireless communication in vehicular environments [2].

In VANET, the PHY layer and MAC layer are two important components in IEEE 802.11p standard that have a great influence on channel usage. In the PHY layer, Dedicated Short Range Communication (DSRC) regulates the channel access time divided into synchronous intervals of a fixed length of 100 ms. Where the duration of the Control Channel (CCH) and the Service Channel (SCH) divided respectively is 50ms (of which 4ms reserved for guard time) [5]. In the MAC subclass, the Enhanced Distributed Channel Access (EDCA) mechanism [7] only supports four distinct Access Categories (AC) types instead of eight AC types in IEEE 802.11e to support high mobility [8].

Broadcast is the main method of exchanging information between vehicles in the network. Its purpose is to send emergency warning messages and periodically broadcast vehicle status (e.g. vehicle speed, acceleration, position, and direction). However, broadcast transmission suffers from several technical problems that affect the performance of the VANET network. Then it leads to a severe issue ensuring effective maintenance of priority differentiation and reducing collision between safe message traffic types.

In the IEEE 802.11p EDCA mechanism, emergency messages have higher access priority than other messages. However, the EDCA mechanism can't adapt to changing network conditions [9]. The value of CW and Arbitration Inter-Frame Space (AIFS) can affect the collision rate of safe message traffic. The EDCA mechanism still leads to conflict among concurrent threads of equal priority. Especially in high traffic areas, the number of vehicles competing to access the wireless environment can become very large. The high-priority safe message traffic can be degraded in bandwidth because the low-priority safe message traffic often occupies the channel. Moreover, there is additional latency due to backoff counter freezing for high-priority safe message traffic in a delayed state. The reason is that the backoff mechanism selects backoff

values in the range $[0, CW[AC[i]]]$ for all safe message traffic [10].

The CW mechanism implemented based on [1] shows that it improved the limitations of the EDCA mechanism. It prioritizes according to the urgency levels of the data and then increases the safe message received rate. However, this mechanism does not ensure providing strict distinction between the CW ranges of each data traffic type in the case of high vehicle density.

Our paper aims to solve the problem of effectively differentiating by priority and reducing the safe message collision rate. The method to recognize the current local condition of the network is based on [1] analyzing the percentage of successfully received frames. Our mechanism slides the CW size adaptively and prioritizes safe message traffic.

The rest of the paper is structured as follows. Section II presents the related work of broadcasting in VANET. Section III presents the adaptive sliding contention window design. Section IV presents simulations and results. Conclusion and future work are presented in Section V.

II. RELATED WORKS

The issue of broadcast transmission in VANET has been attracting much research in terms of reducing collisions, contention, redundancies, and hidden node problems. Torrent Moreno et al. [9] showed that under saturation conditions the probability of receiving broadcast messages can be reduced by 20% to 30%. The paper claims that the main reason for the adoption rate is the hidden node problem. The authors implement a preemptive access method based on channel access time scheduling to improve the reception rate of broadcast messages.

Chien and Giang [1] proposed an Adaptive Contention Window Control (ACWC) algorithm to improve the safe messages received rate. CW size control algorithm is based on sequence number analysis of recently successfully received frames. The ED mechanism is used in combination to set priority for different safe messages according to the urgency of the data traffic. The proposed mechanism has been shown to be effective in improving the safe message received rate. However, when

a vehicle dense network, there is a possibility of collisions due to simultaneous channel contention between data traffic types of equal priority. It may load the mechanism not effective in maintaining priority separation between different data traffic.

Korkmaz and Ekici et al. [12] proposed a new Urban MultiHop Broadcast (UMB) protocol to solve broadcast storms, hidden nodes, and reliability problems without sharing information between vehicles in urban areas. Directional broadcast and intersection broadcast are the two main scenarios of UMB. In their method, the forwarding task is assigned only to the vehicle furthest within the transmission range without using information about the network topology. The ACK packet is sent by the vehicle chosen to forward the packet. Intersection broadcasting performs message dissemination in all directions using repeaters that are installed at road segments to forward messages to destinations. However, the proposed protocol does not take into account the V2V communications model.

Alasmary and Zhuang [13] introduced a clustering approach to periodically advertise vehicle information such as average speed and the number of neighboring vehicles in one hop. Each cluster is maintained by a cluster head node that broadcasts the message to vehicles in its cluster. Due to the high mobility, the cluster head node needs to be constantly changed, resulting in reduced network performance.

Balador and Calafate et al. [14] proposed DBMACW (Density-Based Method for Adjusting the CW size). The mechanism calculated the network traffic density by estimating the channel conditions using the packet transmission state then the results are stored in a channel state vector. An essential part of the protocol is maintaining a channel state for vector achieving bandwidth efficiency to update the CW.

Reinders and Eenennaam et al. [15] analyzed the network performance by the exchange state messages called beacon. Vehicles use these beacons to establish communication. Their method aims to control the vehicle in real-time by improving the broadcast efficiency in IEEE 802.11p. The CW size will adapt based on vehicle density to improve latency performance received probability.

TABLE I. COMPARISON OF DIFFERENT APPROACHES FOR VANET

Approach	Protocol	MAC Type	Traffic Type	Types of messages	Adjustment of CW	Message Received Rate Calculated	Access Delay Calculated
Torrent Moreno et al. [9]	802.11a	EDCA	Broadcast	Periodic Messages	Based on the power control	Yes	Yes
Chien and Giang [1]	802.11p	EDCA	Broadcast	Both Periodic Messages and Event Driven Messages	It adjusts adaptive the CW size based on message received rate of the nodes	Yes	Yes
Korkmaz et al. [12]	802.11b	DCF	Broadcast	Periodic Messages	Based on multihop broadcast protocol in urban areas	Yes	Yes
Alasmary and Zhuang [13]	802.11p	EDCA	Broadcast	Periodic Messages	Adjust CW sizes according to the three fixed CW ranges based on their speed	Yes	No
Balador et al. [14]	802.11a	EDCA	CBR	Periodic Messages	Based on the network traffic density	Yes	Yes
Reinders et al. [15]	802.11p	EDCA	Broadcast	Periodic Messages	It adjusts the CW size based on traffic density	Yes	Yes
Suthaputchakun et al. [16]	802.11a	EDCA	Broadcast	Both Periodic Messages and Event Driven Messages	It defines min and max CW size	Yes	Yes

Authors of [14, 15] focus on improving network performance by adaptive CW size control based on vehicle density and reception probability. It leads to increases the load on the network.

Suthaputchakul et al. [16] proposed to incorporate the 802.11e EDCA mechanism in VANET based on priority for V2V communication. Each Inter-Vehicle Communication (IVC) is assigned a priority level based on the urgency of the safety event, different QoS requirements in terms of communication reliability, and average latency. In order to increase communication reliability in broadcast-based IVC, the authors applied retransmission mechanisms that can provide a proportional difference in reliability for each prioritized message. However, the authors did not address the problem of tuning QoS parameters according to local network traffic conditions.

Table I provides a comparison of the existing approaches in terms of protocol, MAC type, traffic type, types of messages, adjustment CW, message received rate, and access delay.

The analysis of the above-related research results shows that the authors have tried to find solutions to improve broadcast performance in VANET. However, these methods do not provide a mechanism to ensure QoS, strict distinction between the CW ranges of each data traffic type, and bandwidth efficiency. Overcoming these problems, we propose a new mechanism that controls CW size by using the sliding contention window size for each different data traffic. The proposed mechanism greatly improves bandwidth efficiency, separates priority among data traffic flows, and consumes fewer network resources.

III. ADAPTIVE SLIDING CONTENTION WINDOW DESIGN

The goal of MAC layering in the 802.11 standard is to decentralize access to shared media and the wireless channel between safe message traffic. Therefore, each vehicle should be assigned suitable MAC-specific parameters to calculate the backoff timer for each AC. Each AC safe message traffic used dedicated parameters such as AIFSN[AC], $CW_{min}[AC]$, and $CW_{max}[AC]$. MAC Service Data Units (MSDUs) are delivered through multiple separate backoff timers instead of using a single instance.

This results in high-priority safe message traffic receiving more transmission time than low-priority traffic. However, using the same Arbitration InterFrame Space (AIFS) for each traffic type could lead to conflict between traffics in the same AC. If the number of traffic contentions in the same AC is significant, the collision rate increases. Moreover, in IEEE 802.11p EDCA the MAC layer parameters do not adapt to changing network conditions.

In the case of high vehicle density, it should appropriately increase the initial CW size to reduce the probability of collision. The CW size will also increase the network traffic accordingly to adapt to the changing conditions of the network. Vehicles also operate in the opposite situation where the CW size is reduced due to low vehicle density. Therefore, our mechanism can reduce the congestion rate significantly.

A. Priority Access Control Mechanism

We propose a new CW size control mechanism by sliding the window with a dynamic persistence factor coefficient to set the channel access for the different data traffic types based on the information of network conditions [11]. On the CCH, we classify messages according to different priorities for each data traffic type to combine with the proposed mechanism, as listed in Table II.

TABLE II. PRIORITY OF MESSAGE TYPES IN VANET

Priority	Message Types in VANET
Priority 1: (AC[3])	Accident messages, etc
Priority 2: (AC[2])	Accident indication message
Priority 3: (AC[1])	Periodic broadcast message
Priority 4: (AC[0])	Service advertisement message

In the Adaptive Sliding Contention Window (ASCW) control mechanism, each AC[i] is provided with separate CW ranges. Therefore, each different data traffic type will select a dynamically variable backoff timer in the range $[CW_{min}[AC[i]], CW_{max}[AC[i]]]$ respectively. By strict distinction between the CW range of each data traffic type, ASCW solves the problem of bandwidth reduction of high-priority data traffic due to low-priority traffic frequently occupying the channel. Moreover, it can help high-priority safe messages access the channel faster and minimize the collision between safe messages. The bandwidth efficiency can be improved if the CW range overlap between different data traffics under different channel load conditions. In ASCW, the parameter $ASCW_{size}[AC[i]]$ is CW size for a data traffic type. It is calculated by Eq. (1) as follows:

$$ASCW_{size}[AC[i]] = 2 \times SF[AC[i]] \quad (1)$$

In Eq. (1), $SF[AC[i]]$ is the slip coefficient for each type of data traffic to appropriately determine the level of slip up or slip down of the CW. If AC[i] has high priority, the slip coefficient $SF[AC[i]]$ is small and vice versa. $SF[AC[i]]$ is used instead of the P (Persistence Factor) parameter in the IEEE 802.11p EDCA mechanism after each failed transmission. The P parameter represents a fixed multiplier provided for each AC to adjust for increasing the CW range. In addition, $ASCW_{size}[AC[i]]$ parameter specifies $CW_{B}[AC[i]]$ as the lower bound and $CW_{UB}[AC[i]]$ as the upper bound of the CW at any given time. These limits are adjusted when the window slides but remain between $CW_{min}[AC[i]]$ and $CW_{max}[AC[i]]$. Initialization of parameter $CW_{B}[AC[i]]$ and $CW_{UB}[AC[i]]$ is calculated by Eqs. (2, 3) as follows:

$$CW_{B}[AC[i]] = CW_{min}[AC[i]] \quad (2)$$

$$CW_{UB}[AC[i]] = CW_{min}[AC[i]] + ASCW_{size}[AC[i]] \quad (3)$$

Fig. 1 illustrates the ASCW control mechanism for three data traffic types with different priorities as shown in Table II. The parameter $CW_{B}[AC[i]]$ and $CW_{UB}[AC[i]]$ specify the time interval from which the AC randomly selects the backoff value. The backoff parameter is a new backoff timer that a vehicle uses to adjust CW size,

event-driven emergency messages (accident notifications or emergency vehicles), Priority 2 is represented event-driven emergency warning messages, and Priority 3 is represented periodic messages about the state of the vehicle (vehicle speed, acceleration, position, and direction). The packet size for Priority 1, and Priority 2 is 500 bytes while Priority 3 is 300 bytes. In the simulation, Priority 1 and Priority 2 accounted for 5% respectively, and Priority 3 accounted for 90%. The channel is configured to use the parameters of the DSRC standard as in Table IV.

TABLE IV. NETWORK PARAMETERS

Parameters	Value
PHY	
Channel Type	Wireless Channel
Radio Propagation	Two-ray ground
Antenna type	Omni direction
Network Interface Type	WirelessPhy
MAC Type	802.11e
Interface queue	DTail/Pri
Link Layer Type	LL
lfrqlen	50
Simulation time	450 [s]
CSThresh	-96dBm
RXThresh	-90dBm
bandwidth	6Mbps
Freq	5.9GHz
Pt (200m)	375.4μW
MAC	
SlotTime	13 μs
SIFS	32 μs
PreambleLength	32 μs
PLCPDataRate	6Mbps
basicRate	6Mbps
dataRate	6Mbps
threshold	0.03
MAX_PRI	4

The vehicles were generated in nine scenarios for each model to evaluate the adaptive sliding contention window control algorithm in different vehicle densities. In each scenario, the number of vehicles increases continuously by 40 vehicles (5 vehicles/lane for urban highway or 4 vehicles/lane for rural freeway) to simulate the VANET network to present low, medium, high, and very high vehicle density special. The channel load is defined as (5):

$$\text{Channel Load} = \frac{\text{Number of Vehicles} \times \text{Packet Size}}{\text{Packet Rate}} \quad (5)$$

By using Eq. (5), we can observe the effect of increased network traffic on the performance of network protocols.

As shown in Table V, the channel load is due to the vehicle density. In simulation scenarios, the channel load increases from low to high relative to represent network traffic that varies according to the different conditions of the network. We evaluate the proposed mechanism by comparing it with other mechanisms the original IEEE802.11p EDCA and ACWC. The simulation parameters for the proposed mechanism are shown in Table III.

TABLE V. CHANNEL LOAD FOR EACH SIMULATION SCENARIO

Scenario	Number of Vehicles	Channel Load (Mbps)			Total Channel Load (Mbps)
		Priority 1 (5%)	Priority 2 (5%)	Priority 3 (90%)	
1	80	0.16	0.16	1.73	2.05
2	120	0.24	0.24	2.59	3.07
3	160	0.32	0.32	3.46	4.10
4	200	0.40	0.40	4.32	5.12
5	240	0.48	0.48	5.18	6.14
6	280	0.56	0.56	6.05	7.17
7	320	0.64	0.64	6.91	8.19
8	360	0.72	0.72	7.78	9.22
9	400	0.80	0.80	8.64	10.24

B. Simulation Results

1) Urban Highway Model

In the urban highway model, we simulate nine scenarios with vehicle densities that vary according to different network conditions to evaluate the effectiveness of the proposed mechanism compared to others in terms of collision rate and access delay.

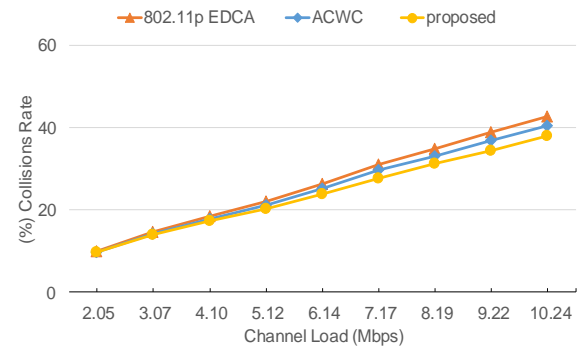


Figure 2. Collision rate of all traffic in urban highway model

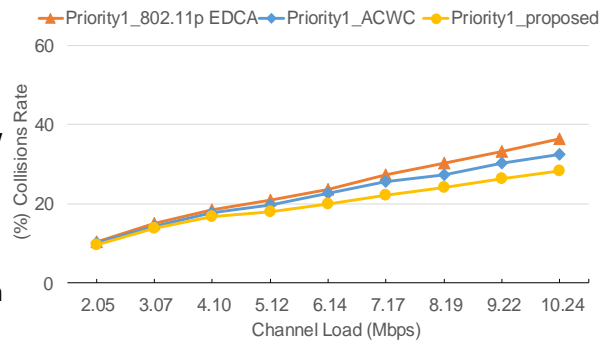


Figure 3. Priority 1 traffic collision rate in urban highway model

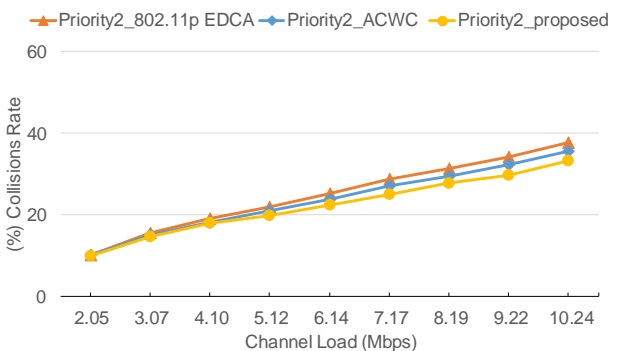


Figure 4. Priority 2 traffic collision rate in urban highway model

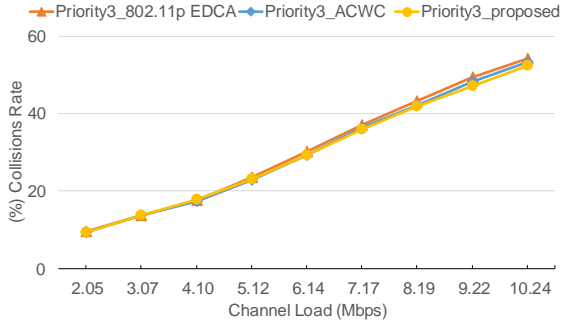


Figure 5. Priority 3 traffic collision rate in urban highway model

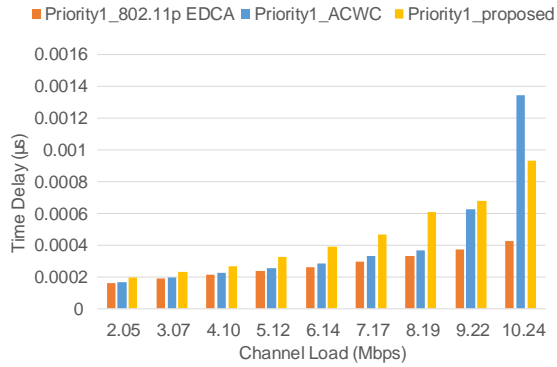


Figure 6. Priority 1 traffic access delay in urban highway model

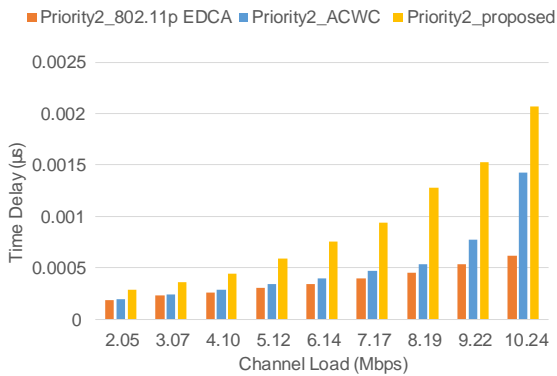


Figure 7. Priority 2 traffic access delay in urban highway model

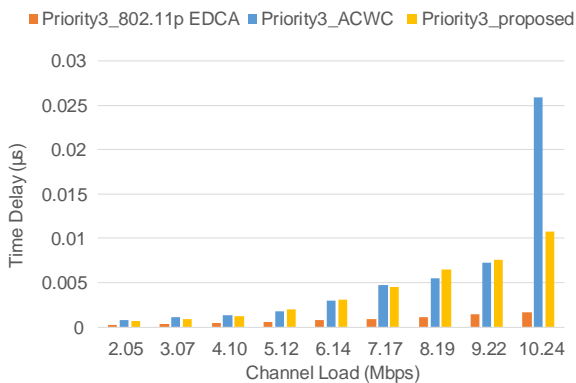


Figure 8. Priority 3 traffic access delay in urban highway model

2) Rural Freeway Model

We simulate the rural freeway model to evaluate the effectiveness of the proposed mechanism in different models. Nine scenarios with different vehicle densities under the same priority in Table V are generated to evaluate the effectiveness of the proposed mechanism similar to that in the urban highway model.

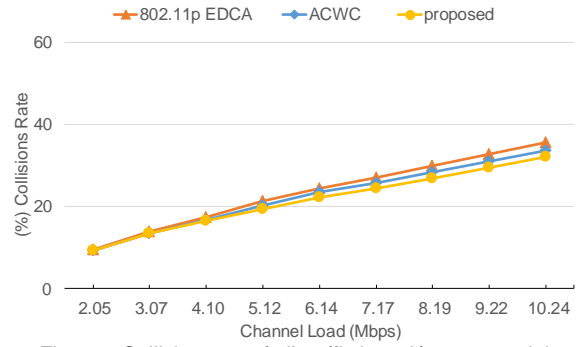


Figure 9. Collision rate of all traffic in rural freeway model

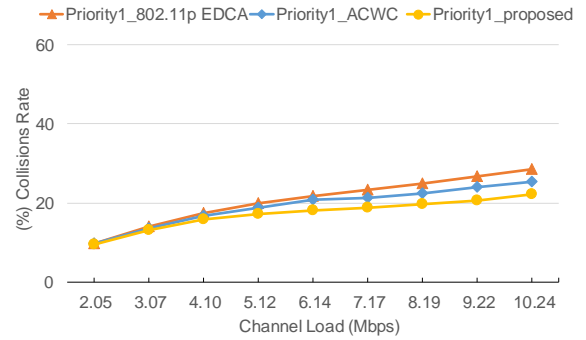


Figure 10. Priority 1 traffic collision rate in rural freeway model

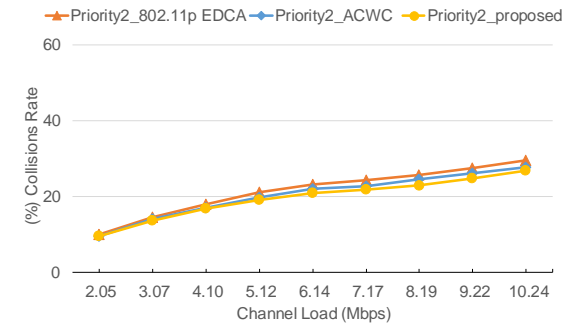


Figure 11. Priority 2 traffic collision rate in rural freeway model

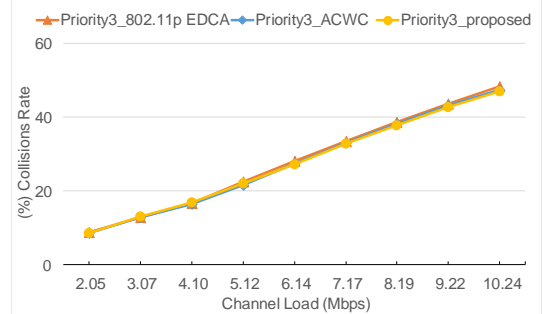


Figure 12. Priority 3 traffic collision rate in rural freeway model

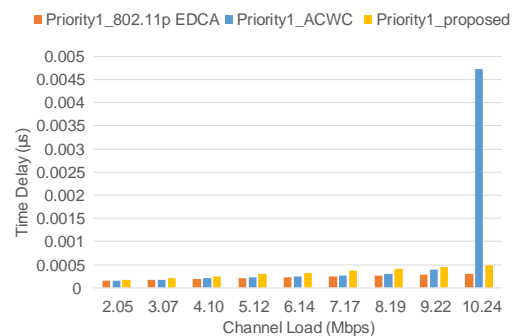


Figure 13. Priority 1 traffic access delay in rural freeway model

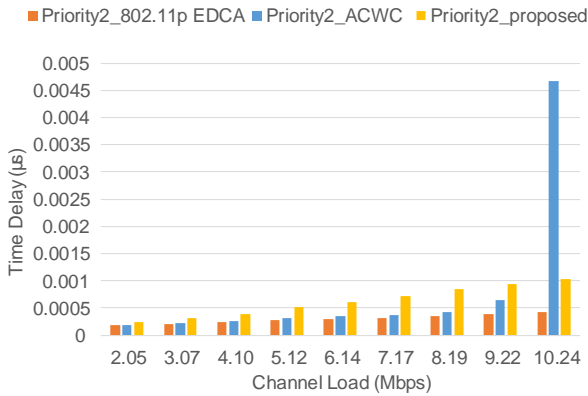


Figure 14. Priority 2 traffic access delay in rural freeway model

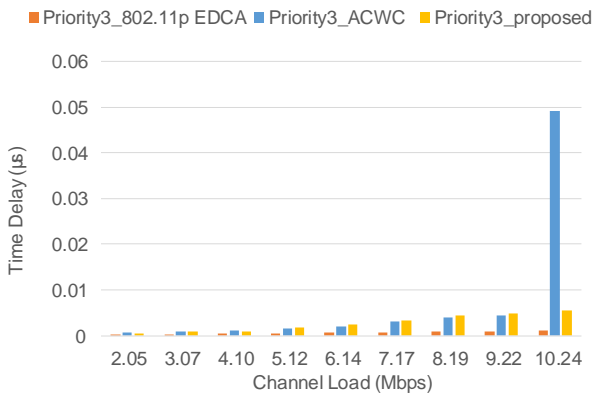


Figure 15. Priority 3 traffic access delay in rural freeway model

C. Simulation Results Analysis

The simulation results in Fig. 8 and Fig. 9 show that our method has achieved the best result in reducing message collision in both models. The reason is that the original IEEE 802.11p EDCA and ACWC mechanisms use a control method based on a random selection of backoff timers in the range $[0, CW[AC[i]]]$ with uniform distribution. However, the optimized value of CW should reflect the priority and the channel condition. Therefore, the proposed mechanism controls the backoff timer by providing a strict distinction between the CW ranges of each data traffic type to achieve the best results.

When the channel load is low, the simulation results in both models show that the adaptive sliding contention window control algorithm has little effect on the safe message collision rate. The reason is that when the network traffic is low, the number of vehicles simultaneously contending for accessing the channel is not much. The safe message collision rate of all traffics in the proposed mechanism reduces by 1% when compared to 802.11p EDCA and ACWC mechanisms. When the channel load is at medium and above bandwidth related to a channel load from 5.12 Mbps to 6.14 Mbps, the proposed mechanism achieves better collision rate performance. Simulation results in both models show that both high priority and low-priority security messages of the proposed mechanism have a reduced security message collision when compared to 802.11p EDCA and ACWC mechanisms. For the urban highway model, the rate is reduced from 5% to 8% when compared with the proposed mechanism in the 802.11p EDCA standard and from 2.6%

to 4.5% when compared to the ACWC mechanism. In the rural freeway model, the rate is reduced from 5.4% to 6.7% when compared with the proposed mechanism in the 802.11p EDCA standard and from 2.1% to 3.9% when compared to the ACWC mechanism. Especially, when the network is in a dense and saturated state, the channel load is 1.2 to 1.7 times larger than the bandwidth related with a channel load from 7.17 Mbps to 10.24 Mbps. The proposed mechanism significantly reduces the collision rate of all safe message traffic. For the urban highway model, the rate is reduced from 9% to 14% compared to the mechanism in the 802.11p EDCA standard and from 6% to 7% compared to the ACWC mechanism. For the rural freeway model, the rate is reduced from 5% to 10.5% compared to the mechanism in the 802.11p EDCA standard and from 6.7% to 47% compared to the ACWC mechanism.

On the other hand, the 802.11p EDCA standard provides a mechanism for prioritizing data traffic based on the setting parameters with differing priority traffic. Therefore, when a dense network of vehicles, the possibility of contention between threads with the same priority is enormous leading to an increase in the collision rate. The ACWC mechanism also reduced the collision rate, however, it is not really effective in maintaining separation by priority for data traffic classes. To solve the above problem, in Figs. 5 and Figs. 10-12 we can see that as network traffic increases, the proposed mechanism ensures good segregation between flows of the same priority in the network. Both Priority 1, and Priority 2 high-priority data traffic, and Priority 3 low-priority data traffic lead to reduced collision rates. Our proposed mechanism increases access delay in comparison with other methods (Figs. 8 and Figs. 13-15). The reason is that in the 802.11p EDCA standard, the CW size is not adjusted and the vehicles just make the transmission as fast as possible without regard to the safe message collision rate so there will be lower access delay. However, all traffic classes in these cases maintain access latency at a level lower than the synchronization interval specified in the IEEE 802.11p standard.

V. CONCLUSION

The paper presents a new mechanism for maintaining priority segregation and reducing the safe message collision rate in VANET. We propose a new mechanism to control the CW size using the adaptive sliding contention window size $ACW_{size}[AC[i]]$ for each data traffic. Each vehicle in the network relies on the analysis data received rate. The mechanism applies the 802.11p EDCA standard to set priority for each different type of security message according to the urgency of the data traffic. The proposed mechanism adds little complexity to the vehicles and does not need additional network resources. The simulation results in different channel load conditions show that the proposed mechanism reduces the rate of safe message collision. Especially in the case of the high vehicle dense network, the urban highway model reduced from 6 to 12% for high-priority data traffic and from 1% to 3% for low-priority data traffic. The rural freeway model reduced from

4 to 9 % for high-priority data traffic and from 0% to 1.4% for low-priority data traffic when compared to the mechanism in the 802.11p EDCA standard and ACWC. However, the proposed mechanism increases access latency compared to other methods, but is still lower than the latency requirements specified in the 802.11p standard. Our future work will focus on adaptively tuning transmission range and transmission rate to minimize access latency, improving network performance under different conditions. On the other hand, we also research and propose more flexible contention window control mechanisms for intelligent transportation systems based on the Internet of Vehicles (IoV).

CONFLICT OF INTEREST

The authors declare no conflict of interest.

AUTHOR CONTRIBUTIONS

H. C. Nguyen proposed the idea and performed the measurements, processed the experimental data, performed the analysis, drafted the manuscript and designed the figures. T. G. Pham was involved in planning supervised the work and revised the paper. All authors discussed the results and approved the final version.

ACKNOWLEDGMENTS

This research is supported by the Vietnam Academy of Science and Technology (VAST) under grant number VAST01.04/2021.

REFERENCES

[1] V. K. Quy, L. N. Hung, and N. D. + D Q 3 & (300da\$stet Energy Saving and Performance P S U R Y L Q J 5 R X W L Q J 0 H F K D Q L Journal of Communications, vol. 14, no. 12, pp. 1211-1217, December 2019.

[2] V. K. Quy, V. H. Nam, D. M. Linh, N. T. Ban, and N. D. Han, 3 & R P P X Q L s 5 1 1 0 W L R Q vehicle ad hoc network in smart cities environment: a comprehensive survey, Wireless Personal Communications vol. 122, no. 3, pp. 2791-2815, February 2022.

[3] M. Lee and T. Atkison, "VANET applications: Past, present, and future, Vehicular Communications, vol. 28, pp. 1003-100, October 2020.

[4] F. Arena, G. Pau and A. Severino, "A review on IEEE 802.11p for intelligent transportation systems, Journal of Sensor and Actuator Networks, vol. 9, no. 2, pp. 22, April 2020.

[5] A. M. S. Abdelgader and Wu The Physical Layer of the IEEE 802.11p WAVE Communication Standard: The Specifications and Challenges in Proc. the World Congress on Engineering, 2014, vol. 2, pp. 691-698.

[6] Y. Park and H. Kim, 3 & R O O L V L R Q F R Q W U O R I S H U L R G L F V D I H P H V V D J H V Z L W K strict messaging frequency requirements, IEEE Transactions on Vehicular Technology, vol. 62, no. 2, pp. 848-852, February 2013.

[7] IEEE Standard for Information Technology-Local and metropolitan area networks-Specific requirements-Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications- Amendment 8: Medium Access Control (MAC) Quality of Service Enhancements, IEEE Std 802.11-2005 (Amendment to IEEE Std 802.11, 1999 Edition (Reaff 2003)-212, November 2005.

[8] IEEE Standard for Information Technology-Local and metropolitan area networks-Specific requirements-Part 11: Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specifications Amendment 6: Wireless Access in Vehicular Environments, IEEE Std 802.11-2010, pp. 1-51, July 2010.

[9] M. Torrent Moreno, D. Jiang, and H. Hartenstein, 3 % U R D G F D V W U H F H S rates and effects of priority access in 802.11p-based vehicular ad hoc Q H W Z I R P D T h e 1 s t A C M I n t e r n a t i o n a l W o r k s h o p n V e h i c u l a r a d H o c N e t w o r k s P h i l a d e l p h i a , P A , U S A 2 0 0 4 , p p . 1 0 - 1 8 .

[10] A. Nafaq, A. Ksentini, A. Mehaoua, B. Ishibashi, Y. Ibraqi, and R. Boutaba, "Sliding contention window (SCW): Towards backoff based service differentiation over IEEE 802.11 wireless LAN networks, IEEE Network, vol. 19, no. 4, pp. 45-51, August 2005.

[11] N. H. Chien and P. T. Giang, 3 & R Q W U R O O L O n t e n t i o n W i n d o w t o I m p r o v e S a f e M e s s a g e R e c e i v e d R a t e i n V A N E T International Journal of Computer Networks and Communications (IJCNC), vol. 14, no. 5, pp. 51-64, September 2022.

[12] G. Korkmaz, E. Ekici, F. Özgüner, and U. Özgüner Urban multi-hop broadcast protocol for inter-vehicle communication systems, in Proc. the 1st ACM International Workshop on Vehicular ad Hoc Networks, 2004, pp. 7-15.

[13] W. Alasmay and W. Zhuang The mobility impact in IEEE 802.11p infrastructureless vehicular networks, in Proc. 2010 IEEE 72nd Vehicular Technology Conference, 2010, pp. 45.

[14] A. Balador, C. T. Calafate, J. Cano, and P. Manzoni Congestion control for vehicular environments by adjusting IEEE 802.11 contention window size, in Proc. 13th International Conference on Algorithms and Architectures for Parallel Processing, 2013, pp. 259-266.

[15] R. Reinders, M. van Eenennaam, G. Karagiannis, and G. Heijnen, "Contention window analysis for beaconing MANETs, in Proc. 2011 7th International Wireless Communications and Mobile Computing Conference, 2011, pp. 148-1487.

[16] C. Subaputachakun and A. Ganz, 3 U L R b a s e d I n t e r v e h i c l e c o m m u n i c a t i o n i n v e h i c u l a r a d h o c n e t w o r k s u s i n g (((i n P r o c . 2 0 0 7 I E E E 6 5 t h V e h i c u l a r T e c h n o l o g y C o n f e r e n c e 2 0 0 7 , p p . 2 5 9 5 - 2 5 9 9 . U 3 1 (/ v

[17] The Network Simulators 2. (Dec. 12, 2022) [Online]. Available: <http://www.isi.edu/nsnam/ns/>

[18] Simulation of Urban Mobility. (Dec. 12, 2022) [Online]. Available: <https://www.eclipse.org/sumo/>

[19] Rapid Generation of Realistic Simulation for VANET (Dec. 12, 2022). [Online]. Available: <https://lens.csie.ncku.edu.tw/MOVE/download.php>

Copyright © 2023 by the authors. This is an open access article distributed under the Creative Commons Attribution License BY-NC-ND 4.0, which permits use, distribution and reproduction in any medium, provided that the article is properly cited, the use is non-commercial and no modifications or adaptations are made.